



Europäisches Patentamt
European Patent Office
Office européen des brevets



⑪ Publication number: **0 654 711 A1**

⑫

EUROPEAN PATENT APPLICATION

⑳ Application number: 94810649.7

⑤① Int. Cl.^o: **G03F 7/004, G03F 7/105,
G03C 7/12**

㉔ Date of filing: 14.11.94

㉓ Priority: 22.11.93 EP 93810807

㉕ Date of publication of application:
24.05.95 Bulletin 95/21

㉖ Designated Contracting States:
CH DE FR GB IT LI

㉗ Applicant: CIBA-GEIGY AG
Klybeckstrasse 141
CH-4002 Basel (CH)

㉘ Inventor: Schädeli, Ulrich Dr.
Im Hubel
1737 Plasselb (CH)
Inventor: Zambounis, John S. Dr.
Engelhardstrasse 41
3280 Murten (CH)
Inventor: Iqbal, Abul Dr.
La Day 202
1732 Arconciel (CH)
Inventor: Hao, Zhimin Dr.
Route du Centre 19
1723 Marly (CH)
Inventor: Dubas, Henri Dr.
Davidenrain 8
4056 Basle (CH)

㉙ Compositions for making structured color images and application thereof.

㉚ Compositions for making structured color images comprising
(a) a soluble pigment precursor which can be transformed to an insoluble pigment by means of chemical, thermal, photolytic or radiation-induced method, and
(b) a binder polymer or prepolymer, or a positive or negative resist-type resin which can be structured by crosslinking, polymerization or depolymerization by applying heat or electromagnetic irradiation.
The compositions can be applied to optical and thermal recording, printing, and the production of color filters for Liquid Crystal Displays, with high accuracy, high transparency and high stability.

EP 0 654 711 A1

BEST AVAILABLE COPY

The present invention relates to novel compositions for making structured color images and applications thereof.

As methods for forming polymer pattern or image layers, there are known various techniques like photolithography, impact printing, such as screen printing, gravure printing, flexo printing and offset printing, non-impact printing, such as ink-jet printing, thermal dye diffusion transfer, laser marking, electrodeposition, etc. In all such imaging and recording methods, the actual coloring material comprises pigments and dyestuffs combined with appropriate resins, binders, polymers and additives.

Such colors are applied, thus, for example, as recording elements of optical memories as disclosed in JP Kokai 05050757 A, as recording elements of thermal recording memories as disclosed in EP-A535788, and as coloring materials for color filters (liquid crystal displays) as described in H.Aruga, J.Photosci.Technol.,3(1)9-18(1990), EP-A380223, K.Mizuno et al., Jpn.J.Appl.Phys.,Part 1, 30 3313-17(1991) and K.Kobayashi, Solid State Technology, 11(1992)15-18. Polymeric pattern layers may be coloured after crosslinking, for example through thermal dye diffusion transfer with well-known dyes as mentioned in EP-008828.

According to the above literature, pigments and dyestuffs are used in the form of compositions containing pigments or dyestuffs, polymers or prepolymers and optionally other additives, which are subject to image formation in order to achieve recording or form colored patterns. The process usually comprises the polymerization of a prepolymer or the depolymerization of a structurable polymer by applying heat or electromagnetic radiation or the combination thereof, and the subsequent development using appropriate developers; alternatively, pigments or dyestuffs may be applied directly in a selective pattern, for example through non-impact printing.

While dyes in general are deficient in terms of light, heat, solvent and chemical resistance, pigments in such applications show problems related to dispersion and dispersion stability, transparency, profile sharpness of absorption or transmission spectra and/or lack of solubility or diffusibility. Many properties desirable for the dye's or pigment's nice incorporation into critical systems such as colour LCD's are contradictory with such required for high quality applications. Unsatisfactory compromises have thus to be complied with, like in JP Kokai 60180889 where stability is obtained at the cost of low optical reflection density and poor color gamut, and many pigment classes cannot be used at all. The present invention overcomes this problem.

Recent development in imaging and recording technology requires, however, compositions for producing patterns or images with

- higher transparency (i.e. high light transmittance), especially for color filter of LCDs,
- higher contrast ratio,
- higher color purity and strength,
- higher pattern resolution and precision of image,
- no (dye) color mixing,
- no clogging of sleeves during purification of color/polymer mixtures,
- smoothness of image surface,
- pinhole free and non-contaminated image layer,
- higher registration accuracy,
- higher sharpness of image edges,
- higher thermal, chemical and light stability, and
- ultra thin film characteristics.

It has now been found, surprisingly, that special soluble pigment precursors may be effected by chemical, thermal, photolytical means, by laser and other means of irradiation to undergo in situ generation of insoluble nano-sized pigment particles, and that the compositions containing the above special pigment precursors for structured color patterns and image formation satisfy the aforementioned requirements.

The present invention relates, accordingly, to novel compositions for forming structured color images containing soluble pigment precursors, in which the precursors regenerate insoluble nano-sized pigment particles by the effect of chemical, thermal, photolytical means or by laser and other means, and application thereof to recording and imaging technology, especially to the fabrication of color filters for LCDs.

In one aspect of the present invention, therefore, there are provided novel compositions for making structured color images comprising

- (a) a soluble pigment precursor which can be transformed to an insoluble pigment by means of chemical-, thermal-, photolytic- or radiation-induced method or a combination thereof; and
- (b) a positive or negative resist-type resin, polymer or prepolymer which can be structured by polarity changes, crosslinking, polymerization or depolymerization by applying heat or electromagnetic irradiation such as UV-, visible-, electron-, neutron-, laser- or X-ray irradiation or a combination thereof.

The soluble pigment precursor (a) according to the present invention is represented by formula I





wherein x is a number from 1 to 4,


A is the residu of a colorant of the quinacridone-, anthraquinone-, perylene-, indigo-, quinophthalone-, isoin-

5 dolinone-, isindoline-, dioxazine-, diketopyrrolopyrrole- or azo series, which is linked to x groups B via N atoms, which nitrogens are part of A and preferably adjacent to or conjugated with a carbonyl group;

B is a group bound to A, represented by formulae

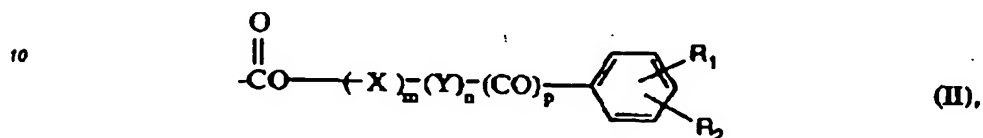

20 or

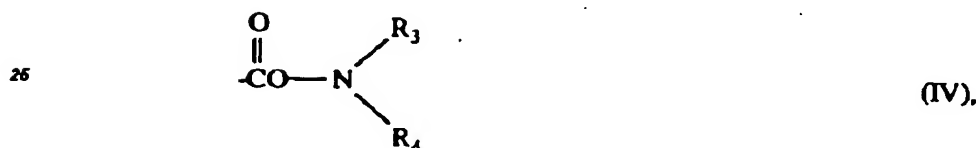

30 and wherein in formulae II, III and IV

m , n and p are each independently of the other 0 or 1,

X is $\text{C}_1\text{-C}_{14}$ -alkylene or $\text{C}_2\text{-C}_6$ -alkanylene,

Y is a group $-\text{V}(\text{CH}_2)_q-$,

Z is a group $-\text{V}(\text{CH}_2)_r-$,

35 V is $\text{C}_3\text{-C}_6$ -cycloalkylen,

q is a number between 1 and 6,

r is a number between 0 and 6,

R_1 and R_2 are each independently of the other hydrogen, $\text{C}_1\text{-C}_6$ -alkyl, $\text{C}_1\text{-C}_4$ -alkoxy, halogen, CN, NO_2 , phenyl or phenoxy which are unsubstituted or substituted by $\text{C}_1\text{-C}_4$ -alkyl, $\text{C}_1\text{-C}_4$ -alkoxy or halogen,

40 Q is hydrogen, CN, $\text{Si}(\text{R}_5)_3$, a group $\text{C}(\text{R}_5)(\text{R}_6)(\text{R}_7)$, wherein R_5 , R_6 and R_7 are each independently of the other hydrogen or halogen and at least one of the residues R_5 , R_6 and R_7 is halogen, a group




50 wherein R_1 and R_2 have the same meaning as given above,

a group SO_2R_8 or SR_8 , wherein R_8 is $\text{C}_1\text{-C}_4$ -alkyl,

a group $\text{CH}(\text{R}_9)_2$, wherein R_9 is phenyl which is unsubstituted or substituted by $\text{C}_1\text{-C}_4$ -alkyl, $\text{C}_1\text{-C}_4$ -alkoxy or halogen, or

a group of formula

55




5

10


15

20

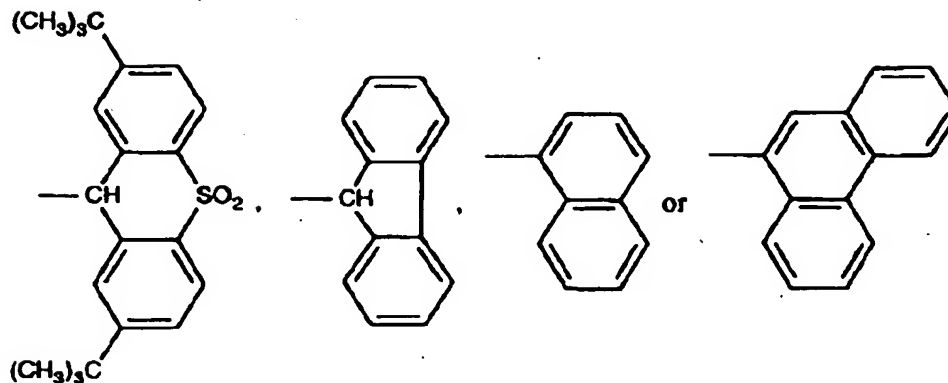

and R_3 and R_4 are each independently of the other hydrogen, C_1 - C_{16} -alkyl or a group

25



30

wherein X , Y , R_1 , R_2 , m and n have the above given meaning, or R_3 and R_4 together with the nitrogen, on which they are bound, form a pyrrolidinyl-, piperidinyl- or morpholinyl residue, and wherein $A(B)_x$ may contain additional

35




40

$=N$ -, $-NH$ - or $-NH_2$ groups.

It is not necessary, and in many cases not indicated, that all the N atoms are linked to groups B; on the other hand, more than one group B may be linked to a single N atom.






A means a residue of well-known nitrogen containing chromophores, for example,






45

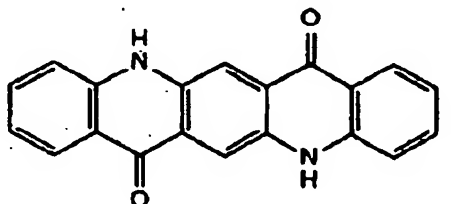


50

55

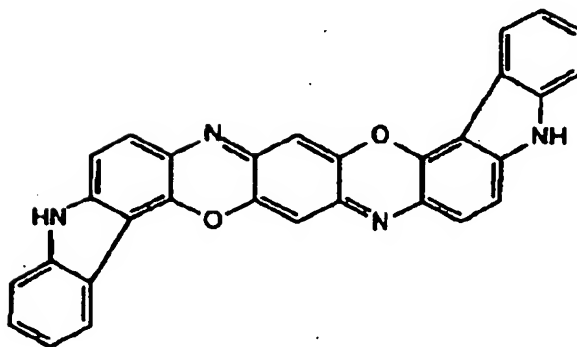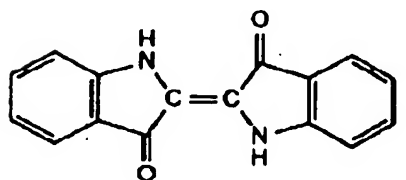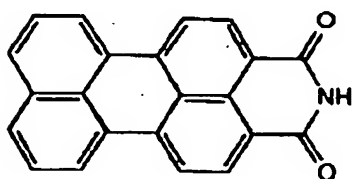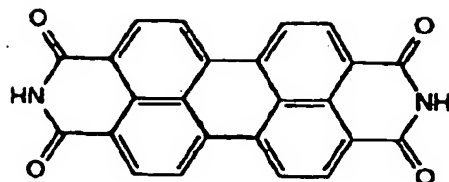

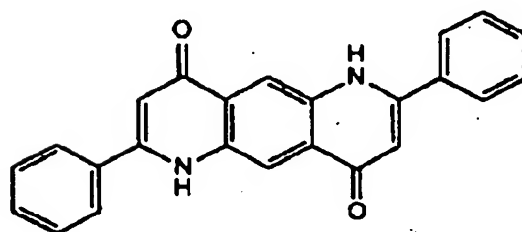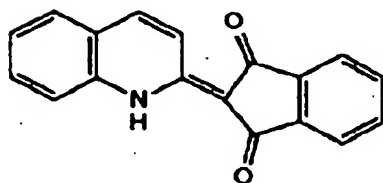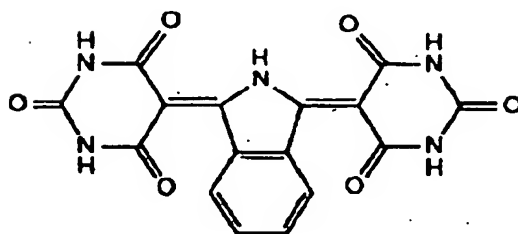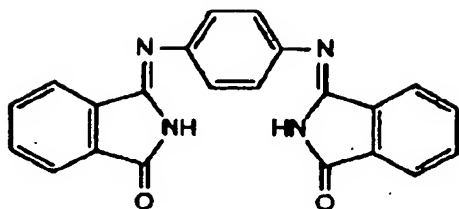


5



10


15

20

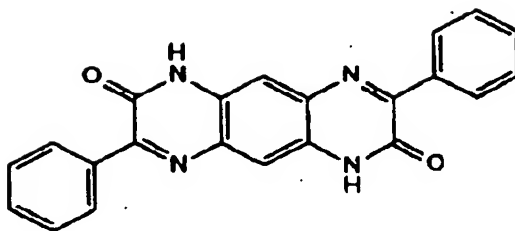


25

30

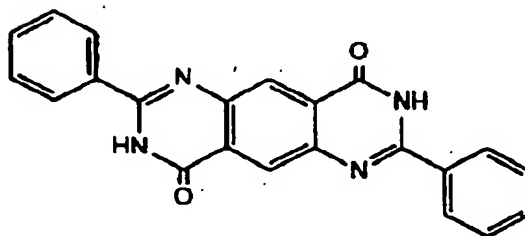


35

40

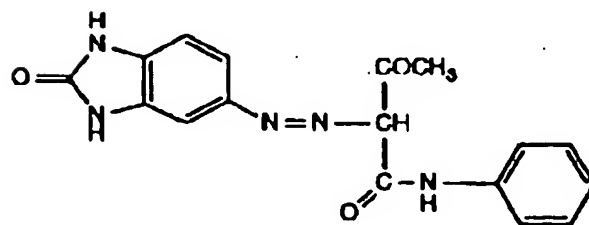

45

50

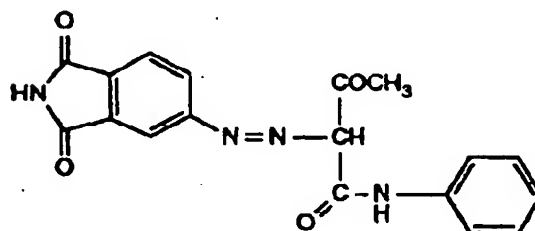

55

5

10

15

20

25

30

35





or

40

45

50

55

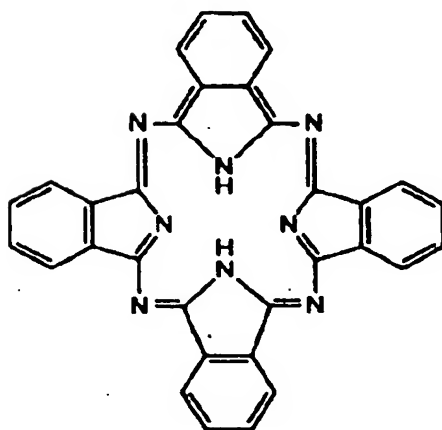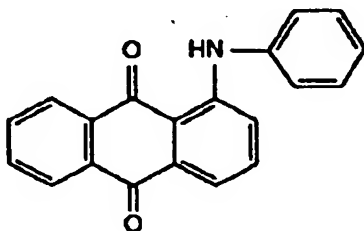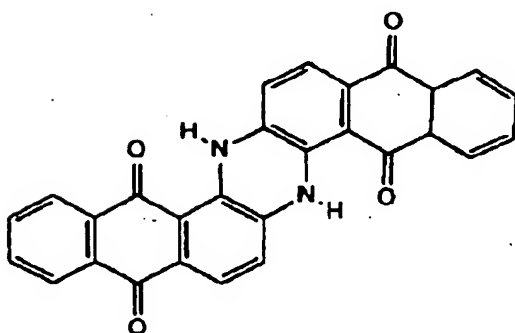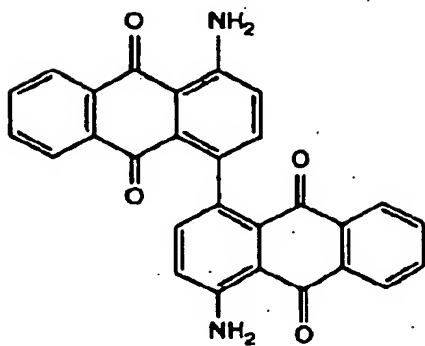

as well as all the known derivatives of such chromophores, respectively.

If X is C₁-C₄-alkylene, then, it is a straight-chain or branched alkylene, such as methylene, dimethylene, trimethylene, 1-methyl-methylene, 1,1-dimethyl-methylene, 1,1-dimethyldimethylene, 1,1-dimethyl-trimethylene, 1-ethyl-dimethylene, 1-ethyl-1-methyldimethylene, tetramethylene, 1,1-dimethyl-tetramethylene, 2,2-dimethyl-trimethylene, hexamethylene, decamethylene, 1,1-dimethyl-decamethylene, 1,1-diethyl-decamethylene or tetradecamethylene.


X as C₂-C₆-alkenylene means straight-chain or branched alkenylene, such as vinylene, allylene, methallylene, 1-methyl-2-butenylene, 1,1-dimethyl-3-butenylene, 2-butenylene, 2-hexenylene, 3-hexenylene or 2-octenylene.

C₃-C₆-cycloalkylene means, for example, cyclopropylene, cyclopentylene and, especially, cyclohexylene. If the substituents are halogen, then, they are, for example, iodo, fluoro, especially bromo, or preferably chloro.

If the substituents are C₁-C₆-alkyl, then, they are, for example, methyl, ethyl, n-propyl, isopropyl, n-butyl, sec-butyl, tert-butyl, n-amyl, tert-amyl or hexyl, and if the substituents are C₁-C₁₈-alkyl, then, they are additionally, for example, heptyl, octyl, 2-ethylhexyl, nonyl, decyl, dodecyl, tetradecyl, hexadecyl or octadecyl.

C₁-C₄-alkoxy means, for example, methoxy, ethoxy, n-propoxy, isopropoxy or butoxy.

Of particular interest are compounds of formula I, wherein x is 1 or 2 and B is a group of formula




and, if x is 2, one of the B residues may also be hydrogen, wherein in formulae IV, V and VI m is 0 or 1.

X is C₁-C₄-alkylene or C₂-C₆-alkenylene,


R₁ and R₂ are each independently of the other hydrogen, C₁-C₄-alkyl, methoxy, chloro or NO₂, and

Q is hydrogen, CN, CCl₃, a group




SO₂CH₃ or SCH₃, and


R₃ and R₄ in formula IV are each independently of the other hydrogen, C₁-C₄-alkyl or a group




or

R₃ and R₄ form a piperidine residue together with the nitrogen atom they are attached to, and, in particular, those wherein x is 2 and B is a group of formula







Preferred compounds of formula I are
a1) perylene-3,4,9,10-tetracarboxylic acid imides of formula

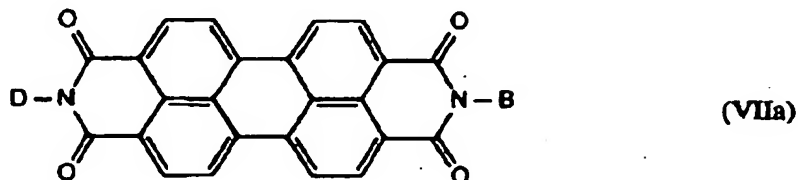


or

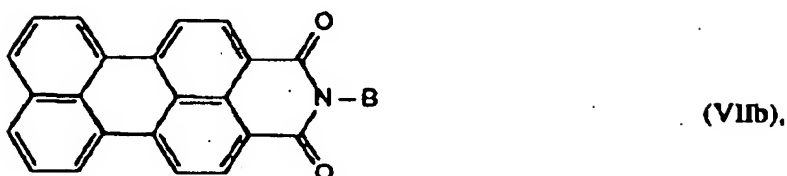



wherein D is hydrogen, C₁-C₈-alkyl, phenyl, benzyl or phenethyl which are unsubstituted or substituted by halogen or C₁-C₄-alkyl, or is the same as B,
a2) quinoxalones of formula

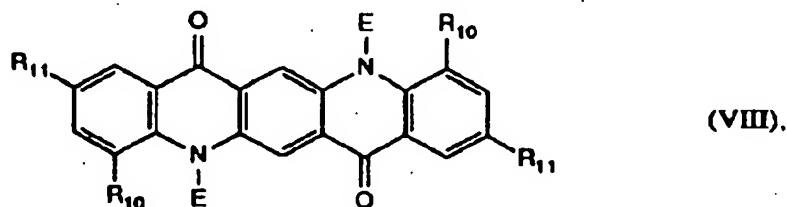


wherein R₁₀ and R₁₁ are each independently of the other hydrogen, halogen, C₁-C₈-alkyl, C₁-C₄-alkoxy or phenyl,
a3) dioxazines of formula

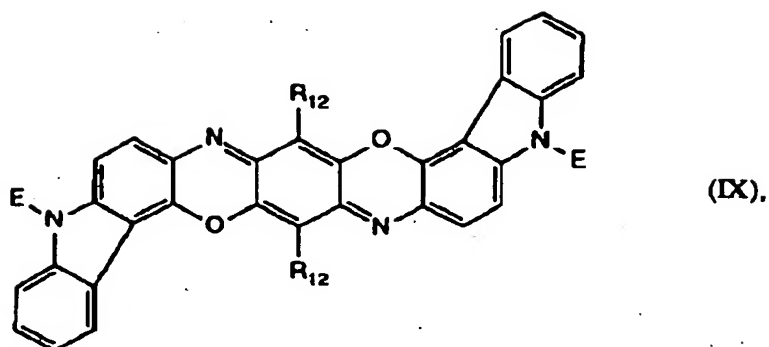

15 wherein R_{12} is hydrogen, halogen or C_1 - C_{16} -alkyl.
 a4) Isoindolines of formula

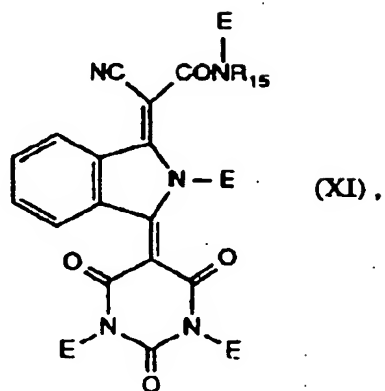

35 wherein R_{13} is a group




45 R_{14} is hydrogen, C_1 - C_{16} -alkyl, benzyl or a group



55 R_{16} is has the same meaning as R_{13} .


R_{16} , R_{17} , R_{18} and R_{19} are each independently of the other hydrogen, C_1 - C_{16} -alkyl, C_1 - C_4 -alkoxy, halogen or trifluoromethyl.

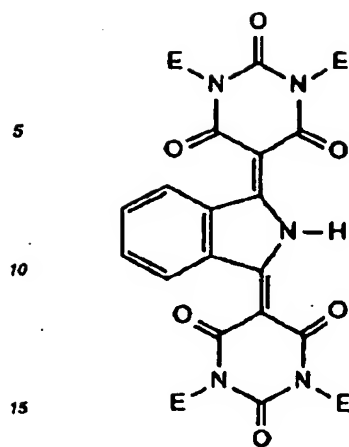

(XIIa)




(XIIb)

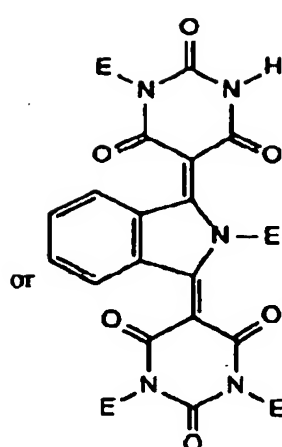


(XIIc)

a5) indigo derivatives of formula

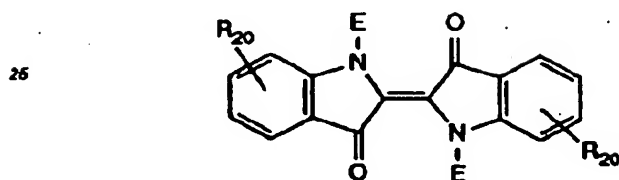


(XIII).

wherein R_{20} is hydrogen, CN, C_1 - C_4 -alkyl, C_1 - C_4 -alkoxy or halogen,
a6) benzimidazolone-azocompounds of formula

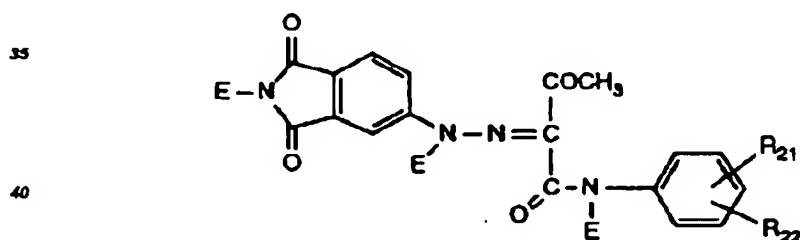


(XIV).

wherein R_{21} and R_{22} are each independently of the other hydrogen, halogen, C_1 - C_4 -alkyl or C_1 - C_4 -alkoxy.
a7) anthraquinone compounds of formula

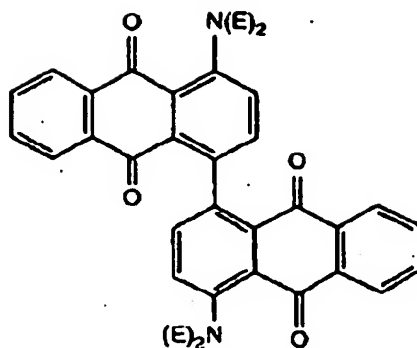


(XV),

a8) phthalocyanine compounds of formula

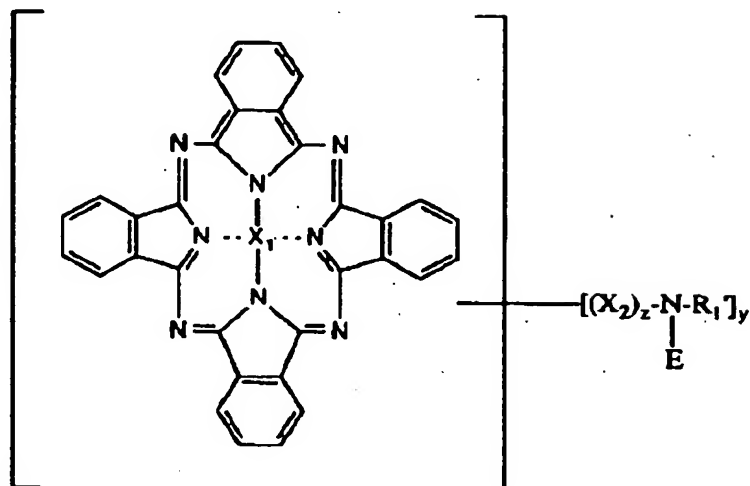


(XVI),

wherein X_1 is Ni, Fe, V, preferably H_2 , Zn or Cu,
 X_2 is $-CH(R_2)-$, preferably $-CH_2-$, or $-SO_2-$,
 R_1 is C_1-C_4 -alkyl, $-N(E)R_2$, $-NHCOR_3$, $-COR_3$ or




preferably hydrogen, $-NHCOCH_3$ or benzoyl.
 R_2 is hydrogen or C_1-C_4 -alkyl,
 R_3 is C_1-C_4 -alkyl, R_4' is hydrogen, halogen, C_1-C_4 -alkyl or C_1-C_4 -alkoxy, and
 z stands for zero or 1, preferably 1, and y is an integer of 1 - 4,
 and
 a9) pyrrolo[3,4-c]pyrroles of formula




(XVII),


wherein G_1 and G_2 are each independently of the other a group of formula

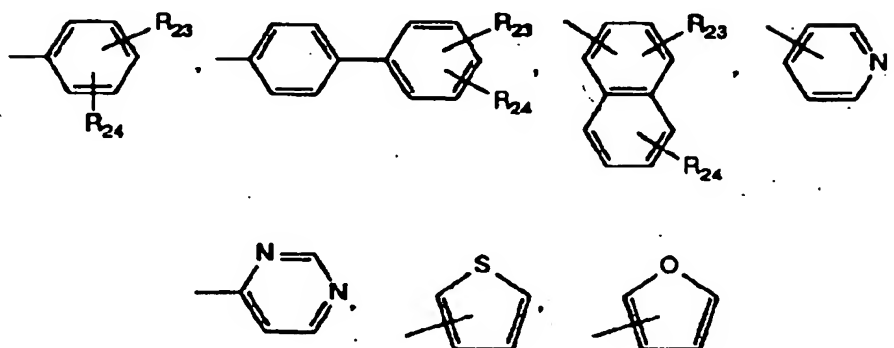

or

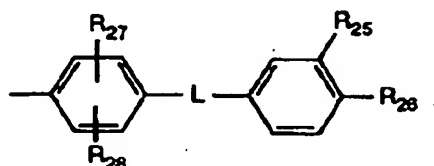

wherein R_{23} and R_{24} are each independently of the other hydrogen, halogen, C_1 - C_{18} -alkyl, C_1 - C_{18} -alkoxy, C_1 - C_{18} -alkylmercapto, C_1 - C_{18} -alkylamino, -CN, -NO₂, phenyl, trifluoromethyl, C_5 - C_6 -cycloalkyl, -C=N(C_1 - C_{18} -alkyl),



imidazolyl, pyrazolyl, triazolyl, piperazinyl, pyrrolyl, oxazolyl, benzoxazolyl, benzthiazolyl, benzimidazolyl, morpholinyl, piperidinyl or pyrrolidinyl,

L is $-CH_2-$, $-CH(CH_3)-$, $-C(CH_3)_2-$, $-CH=N-$, $-N=N-$, $-O-$, $-S-$, $-SO-$, $-SO_2-$ or $-NR_{29}$,

R_{25} and R_{26} are each independently of the other hydrogen, halogen, C_1 - C_6 -alkyl, C_1 - C_{18} -alkoxy or -CN,

R_{27} and R_{28} are each independently of the other hydrogen, halogen or C_1 - C_6 -alkyl and

R_{29} is hydrogen or C_1 - C_6 -alkyl,


whereby E in the above formulae stands for hydrogen or B , with the proviso that least one E stands for B , and B has the above given meaning which is also valid for the above mentioned preferred compounds.

C_1 - C_{18} -alkylmercapto is, for example, methylmercapto, ethylmercapto, propylmercapto, butylmercapto, octylmercapto, decylmercapto, hexamethylmercapto or octadecylmercapto, and C_1 - C_{18} -alkylamino means, for example, methylamino, ethylamino, propylamino, hexylamino, decylamino, hexadecylamino or octadecylamino.

C_5 - C_6 cycloalkyl is, for example, cyclopentyl or cyclohexyl.

As component (a) of the instant compositions a single compound or a combination of two or more compounds may be used in the practice of the instant invention.

Preferred are the compounds

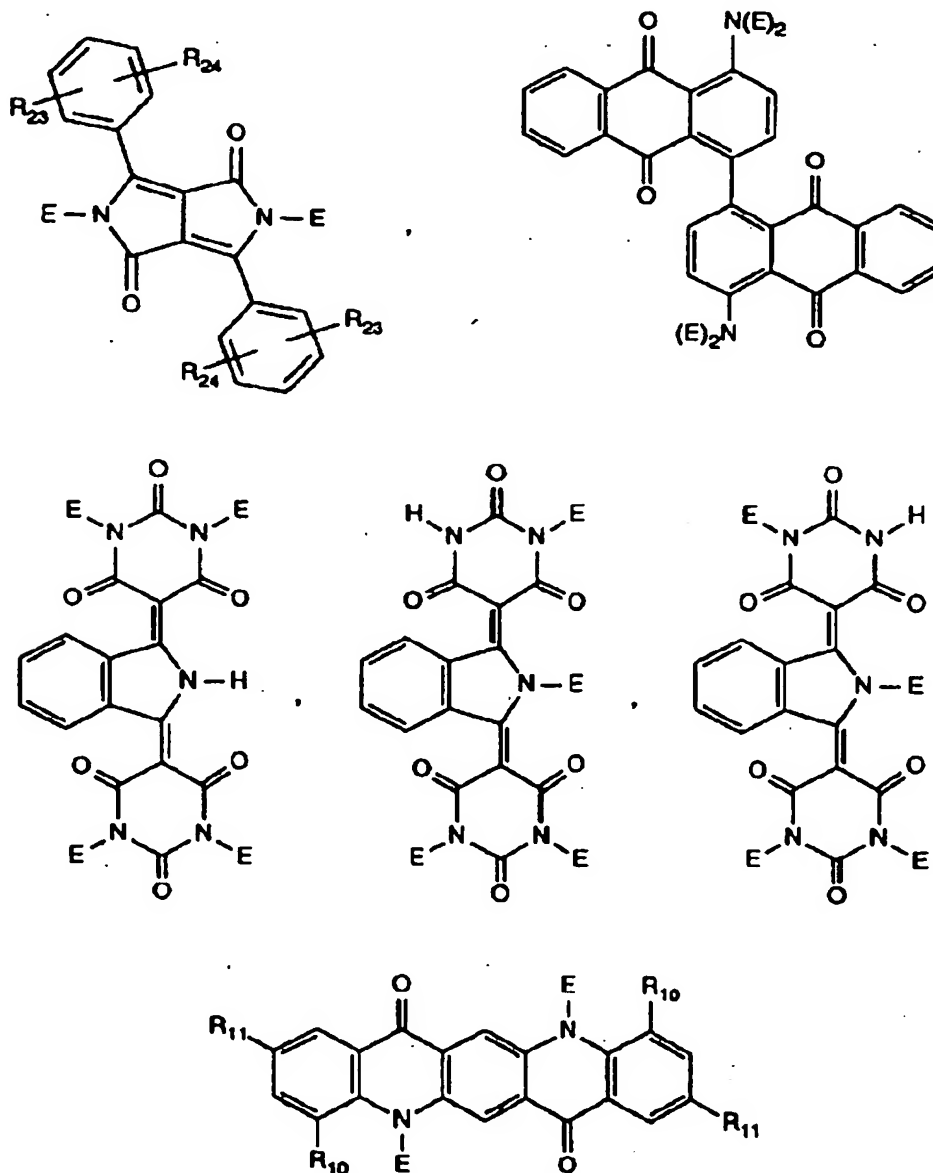

or mixtures thereof, where E is $-C(=O)-O-C(CH_3)_3$, and preferably where R_{10} and R_{11} are each independently of the other hydrogen, halogen, C_1-C_6 -alkyl or C_1-C_4 -alkoxy, and where R_{23} and R_{24} are hydrogen, halogen, C_1-C_6 -alkyl, C_1-C_4 -alkoxy, phenyl or cyano, particularly where R_{10} , R_{11} , R_{23} and R_{24} are hydrogen or chlorine.

For the production of N -substituted pyrrole-pyrroles, it is mentioned, for example, in US-patent 4,585,878 that they can be obtained by reacting N -unsubstituted pyrrole-[3,4-c]pyrrole with a compound containing the corresponding N -substituent as releasing groups in an organic solvent. In only one example which describes a compound containing an N -carbonyl group (example 9: N -benzoyl).

1,4-diketo-3,6-diphenyl-pyrrole[3,4-c]pyrrole is reacted with benzoyl chloride. In experiments to produce desired carbamates in analogous way by reacting with a corresponding acid chloride derivative, for example, a

chlorocarbonic acid ester, it was found, unfortunately, that the carbamates could be obtained only at very low yield.

It was found, however, that the desired carbamate is obtained in surprisingly good yield by using the corresponding trihaloacetic esters or especially the corresponding dicarbonates. An improved yield, even if the improvement may be small, is also obtained if the reaction with an aliphatic acid chloride derivative, for example, chloromaleinic acid-butyl ester, is carried out in the presence of a base as a catalyst.

A suitable process for the production of compounds of formula I is characterized in that a compound of formula



wherein A and x have the hereinbefore given meaning and H is attached to N, is reacted at a desired molar ratio with a dicarbonate of formula



or with a trihaloacetic acid ester of formula




or with an azide of formula



or with a carbonate of formula



or with an alkylideneiminoxy formic acid ester of formula



wherein B respectively has the hereinbefore given meaning,

R_a is chloro, fluoro or bromo,


R_b is C_1 - C_4 -alkyl or phenyl unsubstituted or substituted by halogen, C_1 - C_4 -alkyl, C_1 - C_4 -alkoxy or -CN,

R_c is -CN or -COOR_b, and

R_d is phenyl unsubstituted or substituted by halogen, C_1 - C_4 -alkyl, C_1 - C_4 -alkoxy or -CN, in an aprotic organic solvent in the presence of a base catalyst at a temperature between 0 and 400°C, especially between 20 and 200°C, preferably between 10° and 100°C, most preferably between 14 and 40°C, under atmospheric pressure, for 2 to 80 hours.

Preferably, the compound of formula $A(H)_x$ is reacted with a dicarbonate of formula $B-O-B$.

The compounds of formula $A(H)_x$, dicarbonates of formula $B-O-B$, trihaloacetic acid esters of formula $(R_a)_3C-B$, azides of formula BN_3 , carbonates of formula $B-OR_b$ and alkylideneiminoxy formic acid esters of formula



are known compounds. As far as some of them would be new, they can be produced in analogy with generally known methods.

The respective molar ratio of the above compounds A and reactive derivatives of B depends on the number of groups B to be introduced. A 2- to 10-fold excess of reactive derivatives of B is generally suitable.

As suitable solvents, there are exemplified, for example, ethers, such as tetrahydrofuran or dioxane, or glycolethers, such as ethyleneglycol-methylether, ethyleneglycolethylether, diethyleneglycol-monomethylether or diethyleneglycol-monoethylether, further dipolar-aprotic solvents, such as acetonitrile, benzonitrile, N,N-dimethylformamide, N,N-dimethylacetoamide, nitrobenzene, N-methylpyrrolidon, halogenated aliphatic or aromatic hydrocarbons, such as trichloroethane, benzene or benzene substituted by alkyl, alkoxy or halogen, e.g., toluene, xylene, anisole or chlorobenzene, or aromatic N-heterocycles, such as pyridine, picoline or quinoline. Preferred solvents are, for example, tetrahydrofuran, N,N-dimethylformamide and N-methylpyrrol-


done. The above solvents can be used also as mixtures. 5 - 20 parts by weight of solvents are suitably used to 1 part by weight of the reactants.

The bases appropriate as catalysts are, for example, the alkali metals themselves, such as lithium, sodium or potassium, as well as their hydroxides and carbonates, or alkali amides, such as lithium-, sodium- or potassiumamide or alkali hydrides, such as lithium-, sodium- or potassiumhydride, or alkali earth- or alkali alcoholates, which are derived especially from primary, secondary or tertiary aliphatic alcohols with 1 to 10 C-atoms, e.g., lithium-, sodium- or potassiummethyle, -ethyl-, -n-propyl-, -isopropyl-, -n-butyl-, -sec.-butyl-, -tert.-butyl-, -2-methyl-2-butyl-, -2-methyl-2-pentyl-, -3-methyl-3-pentyl-, -3-ethyl-3-pentyl-, and further organic aliphatic, aromatic or heterocyclic N-bases, especially, for example, diazabicyclooctene, diazabicycloundecene and 4-dimethylaminopyridine and trialkylamines, such as trimethyl- or triethylamine. The above bases can be used also as mixtures.


The organic N-bases, such as diazabicyclooctene, diazabicycloundecene and especially 4-dimethylaminopyridine, are preferred.

Component (b) of the instant compositions, the positive or negative resist-type resin, polymer or prepolymer eligible for use in the present invention are, for example,


b1) positive resists, such as diazoquinone resists based on phenolic resins such as novolac and diazo-naphthoquinones, such as

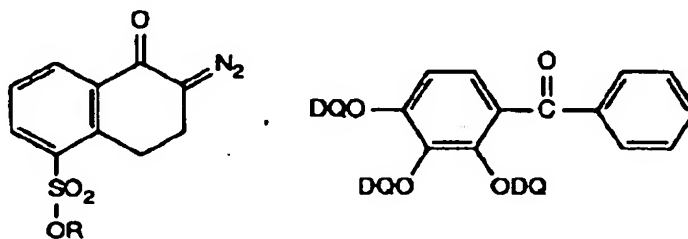

and




wherein R is for example hydrogen, C₁-C₄-alkyl or phenyl unsubstituted or substituted by C₁-C₄-alkyl, -alkoxy, halogen or -CN and DQ means diazonaphthoquinone, or polymers of the formula

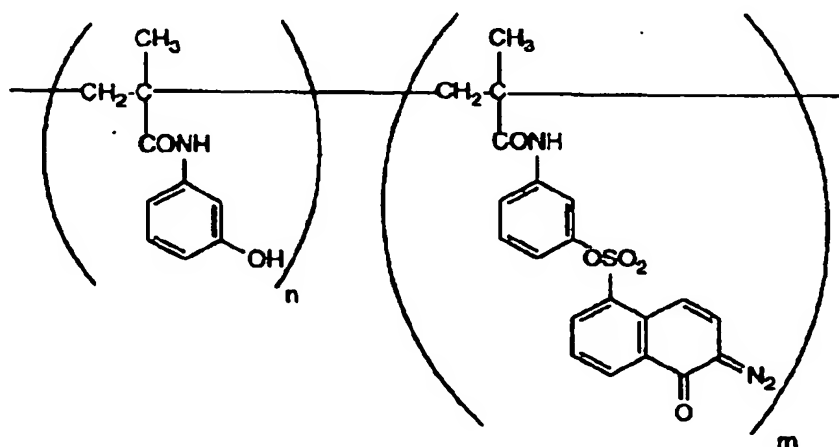


b2) negative resists, such as dichromated polymers such as dichromated gelatine, -starch, -poly(vinyl al-


cohol), -poly(vinylpyrrolidone), -poly(vinyl butyral) and -poly(amide acid) (PAA);
 polymers having crosslinking groups in side chains, such as poly(vinyl cinnamate), poly(vinyl cinnamylidene acetate), poly(vinyl alcohol) to which chalcone or phenylene diacrylate are attached, polyesters of
 p-phenylenediacrylic acid (PPDA) with glycols, such as



and polyesters based on styrylpyridine, such as

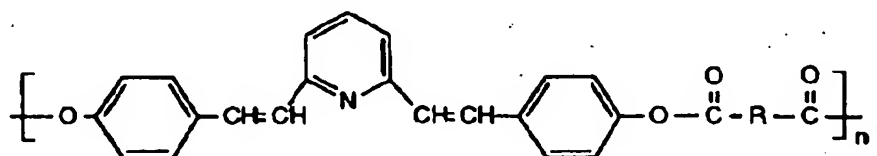


wherein R is




-(CH₂)₄- or -(CH₂)₆-;


water processable resists, such as styrene-maleic anhydride copolymer, phenolic quaternary pyridinium salts, such as

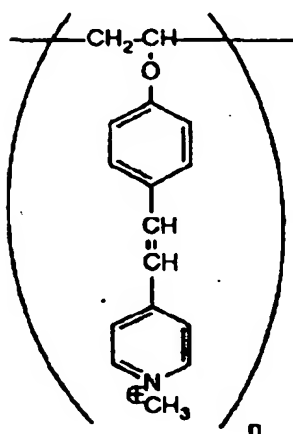


• n RSO₃⁻,

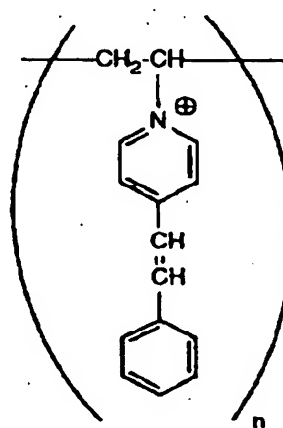

• n RSO₃⁻,

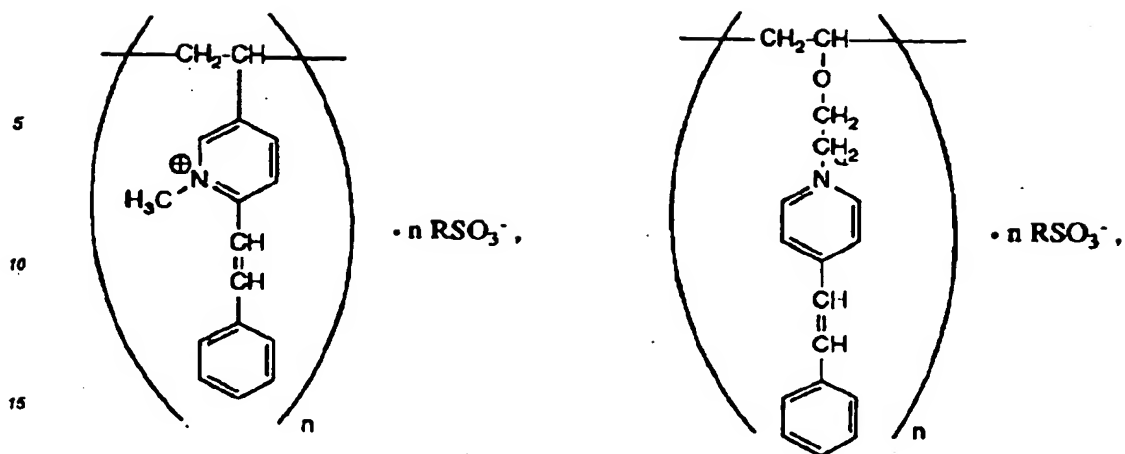


20 wherein for example R is hydrogen or C₁-C₄-alkyl and Ar is phenyl or naphthyl unsubstituted or substituted by C₁-C₄-alkyl, -alkoxy, halogen, -CN or -NO₂, and

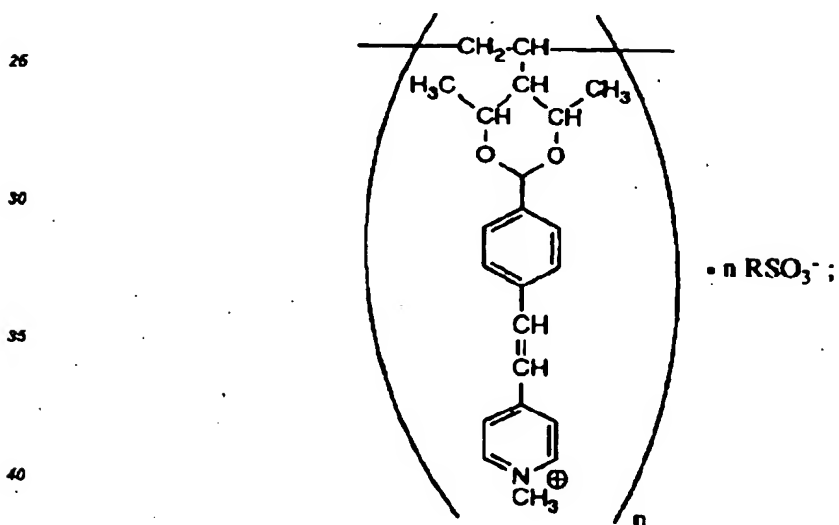


45 polymeric styrylquinolinium salts, such as

50


55

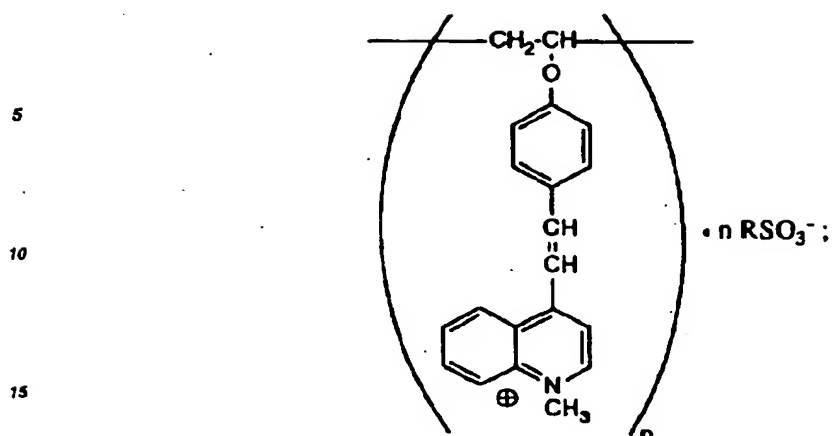


acrylic copolymers having dimethylmaleimide as a side chain having the general formula

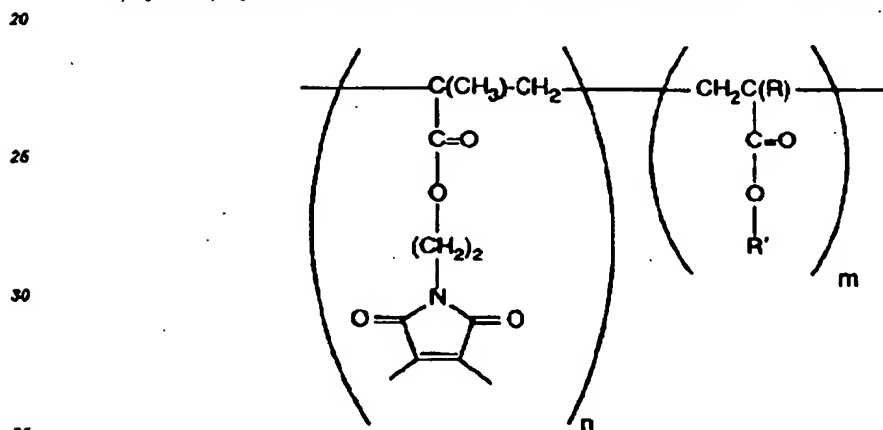

wherein for example R is CH₃ and R' is OH, R is CH₃ and R' is CH₃, or R is H and R' is C₂H₅;
substituted poly(vinyl alcohol) containing diphenylcyclopropane as a side chain having the formula

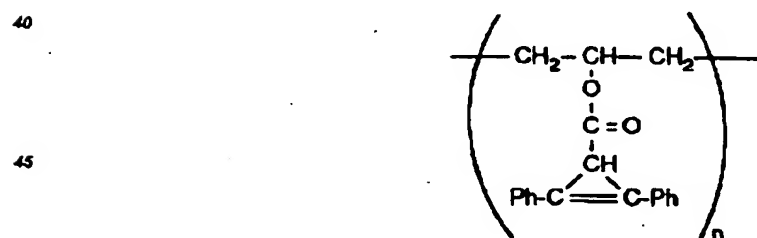

50 polymers having azido groups, such as

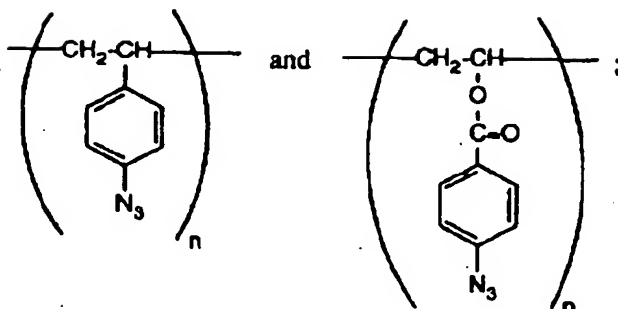


15



20

25


bis-azide resists based on poly(*cis*-isoprene) and bis-azides, such as 2,6-bis(4-azidobenzal)-4-methylcyclohexanone (ABC), 4,4'-diazidostilbene, 4,4'-diazidobenzophenone or 4,4'-diazidobenzalacetone; water processable azido resists based on poly(acrylamide) or poly(vinylpyrrolidone) and water soluble bis-azides, such as

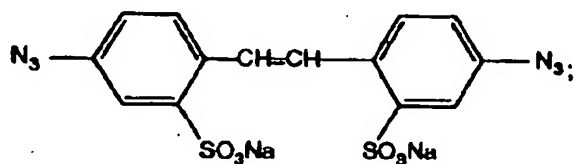


azide resists based on poly(vinyl phenol) and mono-azides, such as

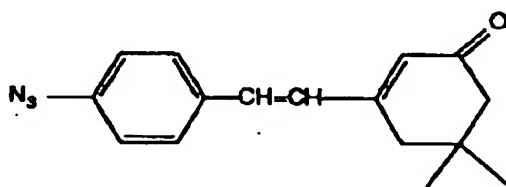

and

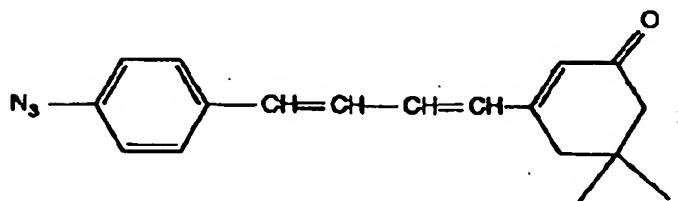


poly(vinyl alcohol) and poly(vinylpyridine) to which a bifunctional acrylsilane, such as

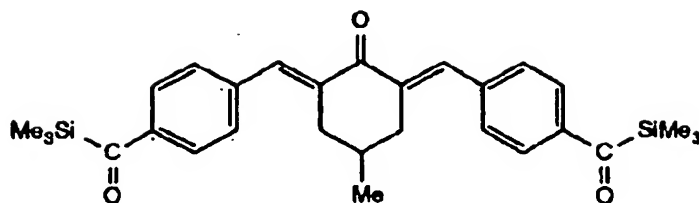


is added;


photocrosslinking copolymers of vinyl benzophenone and 4-dimethylaminostyrene; photoreactive polyimides having for example a repeating unit of

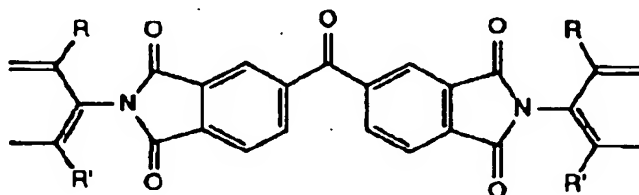


wherein R and R' are each independently of the other methyl or ethyl; and diazoresins, e.g., of formula

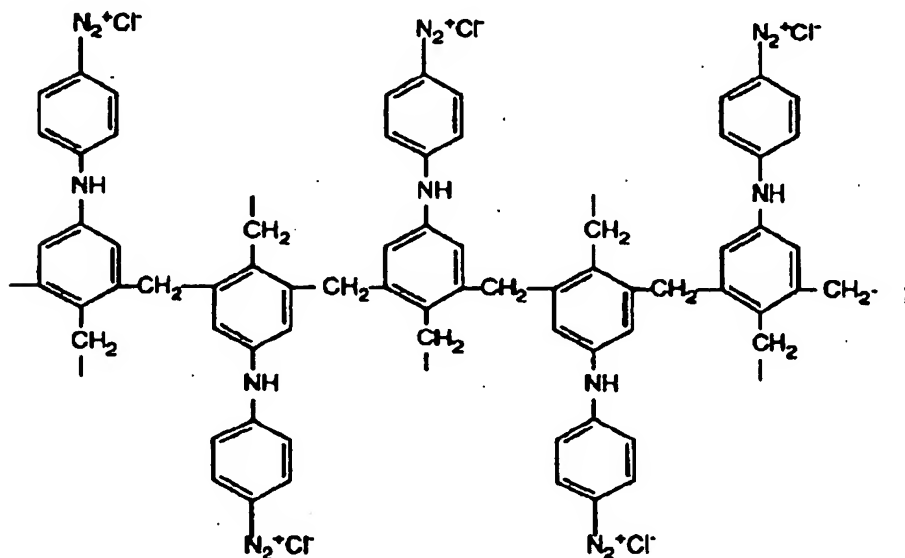


b3) photopolymers containing monomers, such as acrylates, methacrylates, acrylamide and styrene; crosslinkers, such as 1,6-hexanediol diacrylate, triethyleneglycol diacrylate, N,N'-methylenebis(acrylamide), trimethylolpropanetriacrylate, pentaerythritol triacrylate and pentaerythritol tetraacrylate; binders, such as polymers of the monomer used, polyesters, polyurethanes, nylons, polycarbonates and cellulose derivatives; fillers, such as organophilic silicas and clays; initiators, such as benzoin derivatives, anthraquinones plus hydrogen donors, and benzophenones and amines; and stabilizers, such as p-methoxyphenol, hydroquinones and naphthols; especially those containing reactive binders, such as unsaturated polymers obtained by the condensation of maleic and fumaric acid with glycols, polyfunctional acrylates based on bisphenol A, such as




and




and other polyfunctional prepolymers, such as

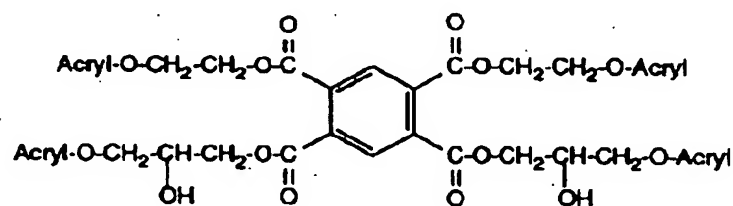


and

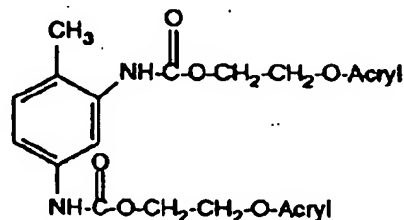


b4) positive deep-UV resists, such as modified diazoquinone resist based on novolac and diazopyrazolidine dione, diazotetramic acid, diazopiperidine dione and diazo-Meldrum's acid of formula



resists based on o-nitrobenzyl esters, such as




or mixtures of cholic acid of formula

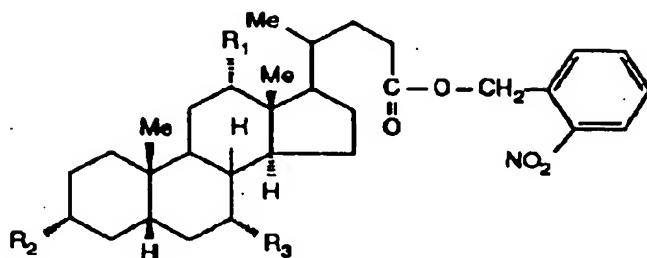


wherein for example R₁, R₂ and R₃ are each OH; R₁ and R₂ are OH and R₃ is H; R₁ and R₃ are H and R₂ is OH; R₁, R₂ and R₃ are each H; R₁, R₂ and R₃ are each OCOCF₃; R₁, R₂ and R₃ are each OCOC(CH₃)₃; or R₁, R₂ and R₃ are each OCOCH₃, with novolac or copolymer of methyl methacrylate and methacrylic acid; o-nitrobenzyl-substituted polyethers, such as




m-poly(nitroanilide) of formula

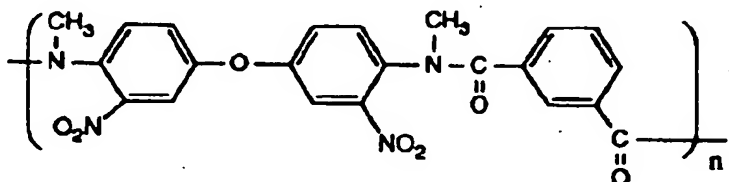


poly(p-acetoxystyrene); poly(methyl methacrylate) (PMMA) derivatives, such as 3-oximino-2-butanone methacrylate (OMMA)-MMA copolymer, OMMA-methacrylonitrile-MMA terpolymer, MMA-indenone copolymer of formula

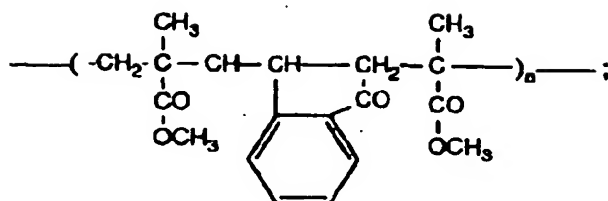


poly(methyl isopropyl ketone) (PMIPK) of formula

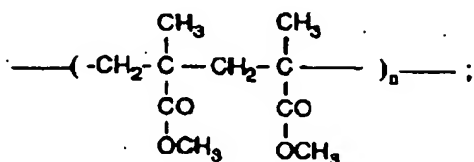


polymers containing triphenylcarbonium ion in their backbone, such as

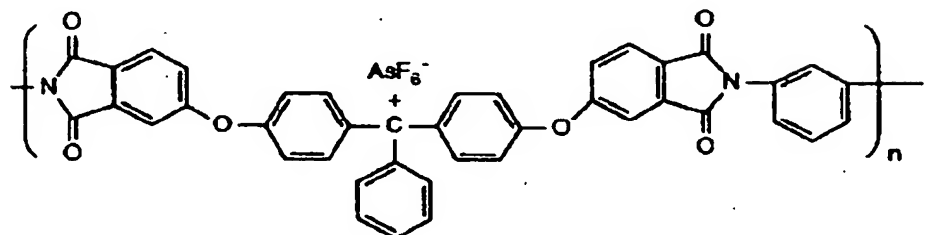

poly(tert-butoxycarbonyloxystyrene), preferably with an onium salt acid generator; novolac with carbonates and onium salts or with naphthalene-2-carboxylic acid-tert-butyl ester; polycarbonates, such as

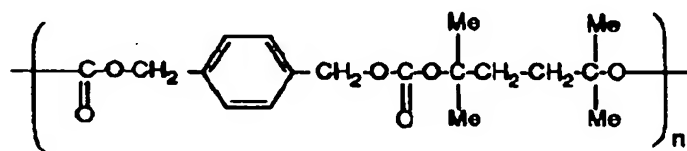

or

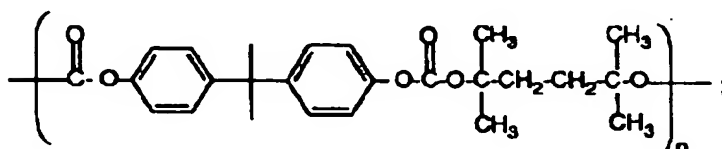

and copolymers of phthalaldehyde with o-nitrobenzaldehyde;

b5) negative deep-UV resists, such as bis-azide-cyclized rubber composition containing 4,4'-diazidodiphenyl sulfide, bis-azide-poly(vinyl phenol) composition containing 3,3'-diazidodiphenyl sulfone and bis-azido-poly(methyl methacrylate) composition containing 3,3'-diazidodiphenyl sulfone, epoxides with onium salts

or with n-hexyloxydiazonium hexafluorophosphate;

b6) positive electron resists, such as PMMA derivatives, such as poly(perfluorobutyl-methacrylate), poly(hexafluoro methacrylate), and especially poly(2,2,2-trifluoroethyl- α -chloroacrylate);

copolymers of MMA with methacrylic acid, acrylonitrile or methacrylic anhydride;

5 terpolymers of MMA, methacrylic acid and methacrylic anhydride;


poly(olefin sulfones), such as poly(butene sulfone);

novolacs with poly(olefin sulfone), such as poly(2-methylpentene-1-sulfone) (PMPS);

poly(p-tert-butoxycarbonyl oxystyrene);

poly(ortho-substituted 2-phenylethyl methacrylates);

10 and polystyrene-tetrathiofulvalene of formula

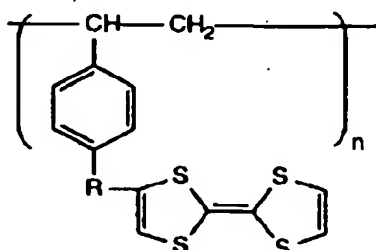

wherein R is for example C_1 - C_{10} -alkylene, -alkenylene, C_6 - C_{10} -cycloalkylene or phenylene unsubstituted or substituted by C_1 - C_4 -alkyl, -alkoxy, halogen or -CN;

25 b7) negative electron resists, such as epoxidized polybutadiene, poly(glycidyl methacrylate) (PGMA), copolymers of glycidyl methacrylate with ethylacrylate (COP);

copolymers of allyl methacrylate with hydroxyethyl methacrylate; and

copolymers of propargyl methacrylate with hydroxyethyl methacrylate;

30 polystyrene based resists, such as iodinated polystyrene and poly(chloromethylstyrene);

poly(vinyl naphthalenes); poly(chloromethylstyrene-co-2-vinyl naphthalene);

poly(vinyl pyridine) quaternized with methyl iodine;

diazoquinone-novolac photoresists;

Langmuir-Blodgett films of ω -tricosenoic acid, -tricosynoic acid and ω -octadecyl acrylic acid;

35 b8) positive X-ray resists, such as Olin-Hunt resist HPR-204 (a commercial product);

b9) negative X-ray resists, such as poly(2,3-dichloro-1-propyl acrylate) (DCPA), poly(chloromethylstyrene) (PCMS), chlorinated poly(methylstyrene) (CPMS), copolymers of allyl methacrylate with 2-hydroxyethylmethacrylate or glycidylmethacrylate;

40 b10) chemically or thermally effectable polymers, such as poly-p-hydroxystyrene or novolac with melamine crosslinker, which system undergoes crosslinking by applying heat in the presence of acid catalysts;


copolymers of p-hydroxystyrene and esterified p-hydroxymethylstyrene, which crosslink under the presence of acid;

COP resins which crosslink under the presence of amines; latent polyamines, such as

5

10

15

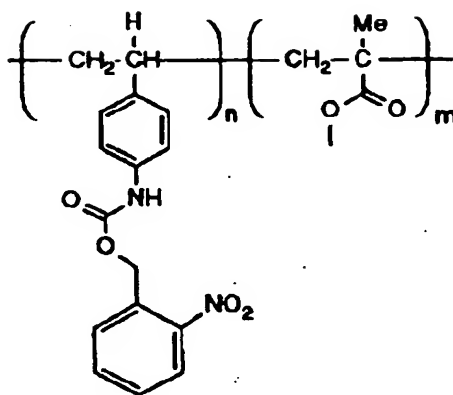

20

25



which undergo crosslinking upon irradiation with light under the presence of bis-epoxide; epoxy resins, such as glycidylated cresol novolac, bisphenol A diglycidyl ether, hydantoin-N,N'-biglycidide, propylene-1,3-bis(hydantoin-2-hydroxytriglycidide), p-aminophenoltriglycidide, diaminodiphenylmethanetetraglycidide, vinylcyclohexene dioxide, 3,4-epoxycyclohexylmethyl-3,4-epoxycyclohexanecarboxylate and mixtures thereof, which crosslink in the presence of appropriate curing agents, such as polyamines, novolacs, polyaminoamides and polycarboxylic anhydrides; esters of poly(vinyl benzoic acid), such as polymers having repeating groups

30



35

40

45




or

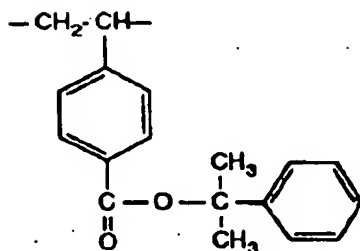


50

which transform to poly(vinyl benzoic acid) by heating in the presence of catalytic amount of acid; blocked poly-p-hydroxystyrenes, such as having repeating groups


55

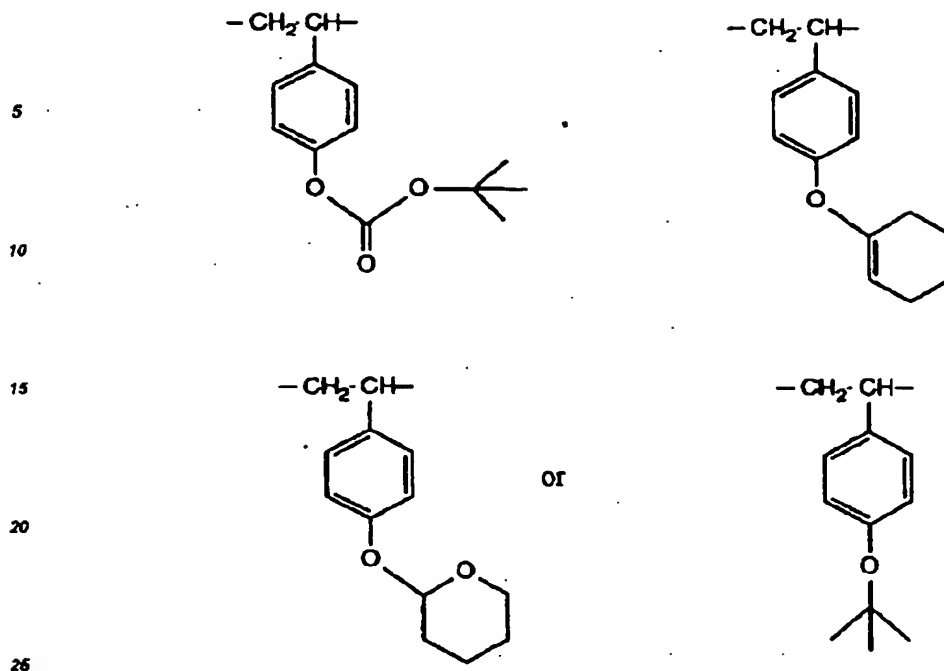

which transform to poly-p-hydroxystyrene by heating in the presence of catalytic amount of acid;
esters of polyacrylates and polymethacrylates, such as having repeating groups

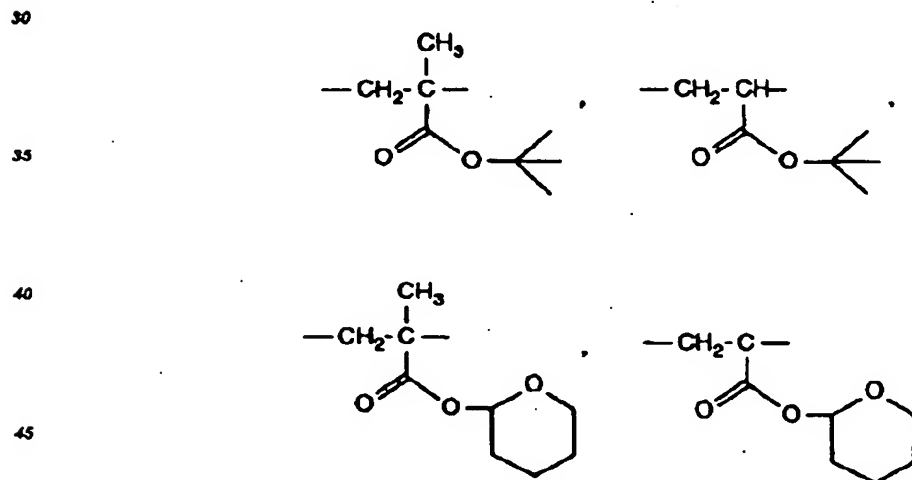

which transform to polyacrylic- or polymethacrylic acid by heating in the presence of catalytic amount of
acid;
polycarbonates, such as having repeating groups




which depolymerize under heating; and

mixtures of methacrylic acid-methyl methacrylate copolymer and methacryloyl chloride-methyl methacrylate copolymer, which crosslink by heating;

b11) positive ion beam resists, such as poly(methyl methacrylate), poly(methylvinyl ketone), poly(tert-butyl methacrylate) and poly(butene sulfone);

b12) negative ion beam resists, such as poly(vinyl acetate), poly(vinyl cinnamate), poly(methyl siloxane), poly(glycidyl methacrylate-co-ethyl acrylate), polystyrene, poly(4-chlorostyrene), poly(4-bromostyrene) and novolac;

b13) silicon containing positive resists, such as poly(dimethylsiloxane), poly(phenylmethylsiloxane), and siloxane substituted propyl methacrylates, such as

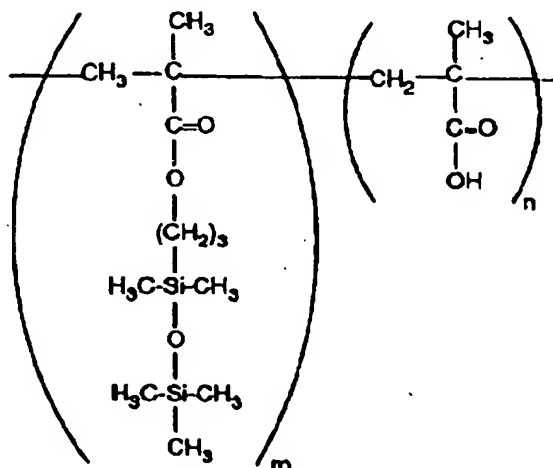

and

b14) silicon containing negative resists, such as copolymers of trimethylsilylmethyl styrene with chlorostyrene, chloromethylated poly(diphenyl siloxane), brominated poly(1-trimethylsilyl propylene), poly(triallyl phenylsilane) together with 2,6-bis(4'-azidobenzal)-methylcyclohexanone, and poly(trimethylsilylmethyl styrene) in combination with 1,2,4-trichlorobenzene and 3,3'-diazidodiphenyl sulfone.

Preferred components (b) of the instant compositions are positive resists of b1), negative resists of b2), photopolymers of b3), positive deep-UV resists of b4), negative deep-UV resists of b5), and chemically and thermally effectable polymers of b10).

Especially preferred are diazoquinone resists; dichromated polymers, such as dichromated gelatine, -starch, -poly(vinyl alcohol), -poly(vinylpyrrolidone), -poly(vinyl butyral) and -poly(amide acid); polymers having crosslinking groups in side chains, such as poly(vinyl cinnamate), poly(vinyl cinnamylidene acetate), poly(vinyl alcohol) to which chalcone or phenylene diacrylate are attached, and polyesters of p-phenylenediacrylic acid (PPDA) with glycols;

bis azide resists based on poly(cis-isoprene) and bis-azides, such as 2,6-bis-(4-azidobenzal)-4-methylcyclohexanone (ABC), 4,4'-diazidostilbene, 4,4'-diazidobenzophenone and 4,4'-diazidobenzofactone;

water processable azido resists;

photopolymers containing reactive binders, the binders being for example, unsaturated polymers obtained by the condensation of maleic and fumaric acid with glycols, polyfunctional acrylates and polyfunctional prepolymers;

poly(tert-butoxycarbonyloxystyrene) with an onium salt acid generator, bis-azide-cyclized rubber compositions containing 4,4'-diazidodiphenyl sulfide and bis-azide-poly(vinyl phenol) compositions containing 3,3'-diazidodiphenyl sulfon;

poly(p-hydroxystyrene) or novolacs with melamine crosslinker together with acid catalysts, esters of poly(vinyl benzoic acid), poly(acrylic acid) and poly(methacrylic acid) having releasing groups which groups are released by heating in the presence of catalytic acid, and blocked poly-p-hydroxystyrenes.

The above mentioned examples of suitable components (b) of the instant compositions are well known in the art and are described for example in A. Reiser, Photoreactive Polymers, John Wiley & Sons, 1989.

If the above composition further contains a catalyst, the polymer structuring and pigment formation is facilitated.

It is preferred, therefore, that the above composition further contains (c) a catalyst for positive or negative polymer structuring and/or pigment formation from the above (b) and (a).

The catalyst (c) is preferably an acid, a base or a compound selectively absorbing a specific wavelength of electromagnetic radiation, e.g., in IR/NIR, and in particular, a latent acid or base.

Examples of such latent acids are, for example, those capable of forming acids under actinic irradiation, such as onium salts, e.g., diazonium, sulfonium, sulfoxonium and iodonium salts.

Preferred are the sulfonium salts of formula XVIII



wherein for example

Ar_1 is phenyl, naphthyl or phenyl-COCH₂- which is unsubstituted or substituted by C₁-C₄-alkyl, C₁-C₄-alkoxy, -OH and/or nitro,

R_{30} is C₁-C₆-alkyl or C₃-C₇-cycloalkyl,

R_{31} is tetrahydrothienyl, tetrahydrofuryl or hexahydropyryl,

s is 0, 1, 2 or 3,

t is 0, 1 or 2,

u is 0 or 1, in which the sum s+t+u is 3, and

X^- is a chloride-, bromide- or iodide anion, BF_4^- , PF_6^- , AsF_6^- , SbF_6^- , FSO_3^- or the anion of an organic sulfonic acid or carboxylic acid.

Preferably, phenyl-, naphthyl- and phenacyl groups Ar_1 are singly substituted, especially by Cl, Br, methyl, methoxy, -OH or nitro. More preferably, these residues are not substituted. R_{30} is preferably C₁-C₄-alkyl, especially methyl or ethyl. Preferably, s is 2 or 3, t is 1 or 0 and u is 0 and more preferably, s is 3 and t and u are 0. Most preferably, Ar_1 is unsubstituted phenyl and s is 3.

If X^- means the anion of an organic sulfonic acid or carboxylic acid, then anions of aliphatic, cycloaliphatic, carbocyclic-aromatic, heterocyclic-aromatic or araliphatic sulfon- or carboxylic acids can be used. These anions can be substituted or unsubstituted. Sulfonic or carboxylic acids with lower nucleophilicity, such as partially- or perfluorinated derivatives or derivatives substituted at the position neighboring the acid groups are preferred. Examples of substituents are halogen such as chlorine or more preferably fluorine, alkyl such as methyl, ethyl or n-propyl, or alkoxy such as methoxy, ethoxy, or n-propoxy.

Examples of aliphatic sulfonic acids are methane- ethane-, n-propane- n-butane- and n-hexane sulfonic acid or corresponding partially- or perfluorinated derivatives.

Examples of aliphatic carboxylic acids are formic acid, acetic acid, propionic acid, butyric acid, pivalic acid, capronic acid, 2-ethylhexyl carboxylic acid and fatty acids, such as lauric acid, myristic acid or stearic acid, as well as partially- or perfluorinated derivatives of these acids.

Examples of cycloaliphatic sulfonic- or carboxylic acids are cyclohexane carboxylic acid, campher-10-sulfonic acid or their partially- or perfluorinated derivatives.

Examples of carbocyclic-aromatic sulfonic acids are benzene-, toluene-, ethylbenzene-, isopropylbenzene-, dodecylbenzene- or dimethylbenzene sulfonic acid, 2,4,6-trisopropylbenzene sulfonic acid, 2,4,6-trimethylbenzene sulfonic acid, naphthalene sulfonic acid, -disulfonic acid or -trisulfonic acid and the corresponding alkylated or partially- or perfluorinated derivatives of these sulfonic acids.

Examples of heterocyclic-aromatic sulfonic acids are pyridine-, thiophene- or pyrrole sulfonic acid and the corresponding partially- or perfluorinated derivatives of these compounds.

Examples of carbocyclic-aromatic carboxylic acids are benzoic acid, toluene-, ethylbenzene-, isopropylbenzene- or dimethylbenzene carboxylic acid, naphthalene carboxylic acid or anthracene carboxylic acid and the corresponding partially- or perfluorinated derivatives of these compounds.

Examples of heterocyclic-aromatic carboxylic acids are pyridine-, thiophene- or pyrrole carboxylic acid as well as the corresponding partially- or perfluorinated derivatives of these compounds.

Examples of araliphatic carboxylic acids are benzyl carboxylic acid, α -methylbenzyl carboxylic acid and

cinnamic acid, as well as the corresponding partially- or perfluorinated derivatives of these compounds.

X⁻ in formula XVIII above is preferably the monovalent anion of an organic sulfonic acid, especially a partially- or perfluorinated sulfonic acid. These anions are characterized by a particularly low nucleophilicity.


5 Examples of particularly appropriate sulfonium salts of formula XVIII are triphenylsulfonium bromide, triphenylsulfonium chloride, triphenylsulfonium iodide, triphenylsulfonium hexafluorophosphate, triphenylsulfonium hexafluoroantimonate, triphenylsulfonium hexafluoroarsenate, triphenylsulfonium trifluoromethanesulfonate, diphenylethylsulfonium chloride, phenacyldimethylsulfonium chloride, phenacyltetrahydrothiophenium chloride, 4-nitrophenacyltetrahydrothiophenium chloride and 4-hydroxy-2-methylphenylhexahydrothiopyrylium chloride.

10 As onium compounds iodonium salts of formula XIX
(Ar₂I⁺-Ar₃)X₁⁻ (XIX)

can be used, wherein for example

Ar₂ and Ar₃ are each independently of the other phenyl or naphthyl which is unsubstituted or substituted by C₁-C₄-alkyl, C₁-C₄-alkoxy, halogen and /or nitro or Ar₂ and Ar₃ together form a group of formula XX

15




20

wherein R₃₂ is C₁-C₄-alkyl, C₁-C₄-alkoxy, halogen or nitro and Y is a direct bond, -O-, -CH₂- or -CO- and X₁⁻ means a chloride-, bromide- or iodide anion.


25 Iodonium salts of formula XIX are described, for example, in GB-A 1 539 192.

As latent acids eligible for use in the present invention, compounds of formulae XXI-XXVIII which generate sulfonic acid under actinic irradiation are also appropriate:


30



35



40






45




50

55

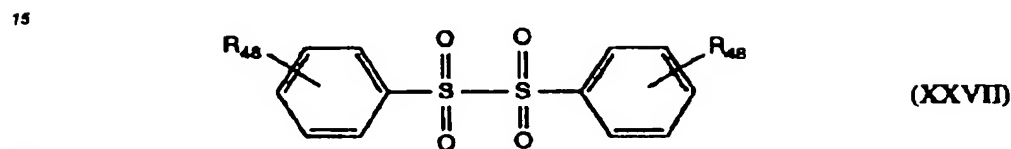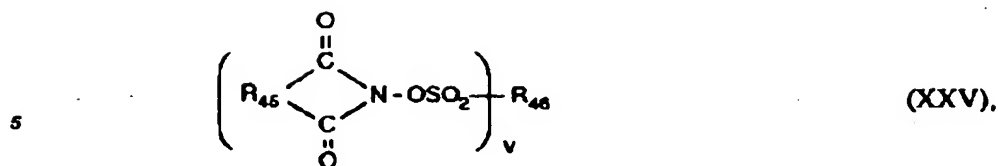

and



30

wherein

v is 1 or 2, preferably 1,

R₃₃ is phenyl or naphthyl which is unsubstituted or substituted by 1-3-Cl, -Br, -CN, -NO₂, C₁-C₄-alkyl, C₁-C₄-alkoxy, C₁-C₄-alkylthio, phenoxy, phenylthio, C₁-C₄-alkylamino, C₂-C₈-dialkylamino or benzoyl, especially phenyl unsubstituted or singly substituted by -Cl, methyl or methoxy,

R₃₄ is hydrogen or C₁-C₄-alkyl and

R₃₅ is hydrogen, C₁-C₄-alkyl or phenyl or

R₃₄ and R₃₅ together with the bonding-C-atom form a cyclopentane or cyclohexane ring,

R₃₆ is, if v is 1, then C₁-C₁₈-alkyl, phenyl or naphthyl which is unsubstituted or substituted by C₁-C₄-alkyl, or cyclopentyl, cyclohexyl or campheryl and if v is 2, then C₂-C₈-alkylene or phenylene,

R₃₇ is phenyl or naphthyl which is unsubstituted or substituted by 1-3-Cl, -Br, C₁-C₄-alkyl, C₁-C₄-alkoxy, C₁-C₄-alkylthio, phenyl, phenoxy, phenylthio, C₁-C₄-alkyl-CONH-, benzoylamino or dimethylamino, and in particular phenyl which is unsubstituted or singly substituted by -Cl, C₁-C₄-alkoxy, methylthio or phenyl,

R₃₈ is -OH or C₁-C₄-alkyl,

R₃₉ is C₁-C₄-alkyl or phenyl,

R₄₀ is hydrogen, C₁-C₄-alkyl, furyl or -CCl₃ or

R₃₉ and R₄₀ together with the bonding-C-atom form a cyclopentane- or cyclohexane ring,

R₄₁ and R₄₂ are each independently of the other phenyl which is unsubstituted or substituted by halogen, C₁-C₄-alkyl or C₁-C₄-alkoxy,

R₄₃ is hydrogen or C₁-C₄-alkyl,

R₄₄ is, if v is 1, then C₁-C₆-alkyl, phenyl, naphthyl or benzyl and if v is 2, then C₁-C₈-alkylene, phenylene or xylylene,

R₄₅ is phenylene or naphthylene or -CH=CH- which is unsubstituted or substituted by halogen, nitro, C₁-C₈-alkyl, C₁-C₄-alkoxy or C₁-C₄-alkylthio,

R₄₆ is, if v is 1, then C₁-C₁₂-alkyl, or phenyl which is unsubstituted or substituted by halogen, nitro, C₁-C₄-alkyl or C₁-C₄-alkoxy, and if v is 2, then C₂-C₈-alkylene or phenylene,

R₄₇ is phenyl or naphthyl which is unsubstituted or substituted by halogen, nitro, -CN, C₁-C₄-alkyl, methoxy, ethoxy, dimethylamino or benzoyl, and


R_{48} are each independently of the other C_1 - C_4 -alkyl.

Alkyl-, alkoxy-, alkylthio-, alkylamino-, dialkylamino-, alkylcarbonyl- and alkylene groups as defined can be straight-chained or branched, however, preferably straight-chained. Halogen means, in particular, -Cl or -Br.

Compounds of formulae XXI-XXVI are described, for example, in EP-A 0 186 682 and EP-A 0 085 024 as well as the literature references cited therein. Particularly preferred compounds of formulae XXI-XXVI are phenacyl-p-methylbenzenesulfonate, benzoin-p-toluenesulfonate, 3-(p-toluenesulfonyloxy)-2-hydroxy-2-phenyl-1-phenyl-1-propanone-(α -(p-toluenesulfonyloxy)methylbenzoin), N-(p-dodecylbenzenesulfonyloxy)-1,8-naphthallimide and N-(phenylsulfonyloxy)-1,8-naphthallimide.

Further appropriate compounds to be used as latent acids are o-nitrobenzaldehydes, which transformed to o-nitrobenzoic acid, such as 1-nitrobenzaldehyde and 2,6-dinitrobenzaldehyde; α -halogenacetophenone, such as α,α,α -trichloroacetophenone and p-tert-butyl- α,α,α -trichloroacetophenone, as well as sulfonic acid esters of o-hydroxyacetophenones, such as 2-hydroxybenzophenone methanesulfonate and 2,4-hydroxybenzophenone-bis-(methanesulfonate).

Finally, such compounds containing aromatically bound chlorine or bromine as described in EP-A 0 318 649, for example, compounds of formula XXIX with at least one aromatically bound chlorine or bromine atom, are appropriate as latent acids:



(XXIX).

wherein for example

p is, for example, 0 or 1.


R_{49} is $-\text{COOH}$, $-\text{OR}_{62}$ or $-\text{SR}_{62}$.

R_{60} and R_{61} are each independently of the other hydrogen, -Cl, -Br, alkyl which may be substituted by aryl, alkoxy, aryloxy, -OH or -F, or aryl which may be substituted by alkoxy, aryloxy, -OH or halogen,

R_{62} is hydrogen, alkyl, aryl or acyl which may be substituted analogously to R_{60} .

A' is, if p is 0, then hydrogen, -Cl, -Br, or alkyl which may be substituted analogously to R_{60} and if p is 1, then $-\text{SO}_2$, propylene or perfluoroalkylene; and

B' is a group




alkylcarbonyl, alkoxy carbonyl or substituted sulfonylimidecarbonyl.

Examples of the compounds of this kind are hexafluorotetrabromo-bisphenol A, 1,1,1-tris-(3,5-dibromo-4-hydroxyphenyl)ethane and N-(2,4,6-tribromophenyl)-N'-(p-toluenesulfonyl)urea.

As compounds of the latent acid, those of formula XVIII wherein Ar_1 is phenyl, a is 3, and X^- is SbF_6^- , PF_6^- and especially the anion of an aliphatic, partially fluoroaromatic or perfluoroaromatic sulfonic acid, are preferred in particular. Particularly preferred anions X^- are CF_3SO_3^- , $\text{C}_2\text{F}_5\text{SO}_3^-$, $\text{n-C}_3\text{F}_7\text{SO}_3^-$, $\text{n-C}_4\text{F}_9\text{SO}_3^-$, $\text{n-C}_6\text{F}_{13}\text{SO}_3^-$, $\text{n-C}_8\text{F}_{17}\text{SO}_3^-$. Triphenylsulfonium trifluoromethanesulfonate is used most preferably as the latent acid.

If the catalysts to be used in the present invention are latent bases, then those capable of forming bases under actinic irradiation are preferred.

As examples of such preferred latent bases, there are compounds of formula XXX



wherein

Co is cobalt (III) ion,

R_{63} , R_{64} and R_{65} are each independently of the other hydrogen, C_1 - C_6 -alkyl or C_3 - C_7 -cycloalkyl, and Z is halogen.

Preferably, R_{63} , R_{64} and R_{65} are each independently of the other straight chained C_1 - C_4 -alkyl and Z is Cl or Br.

Further examples of preferred latent bases are those represented by formula XXXI



5 wherein

Ar_4 is phenyl or naphthyl which is unsubstituted or substituted by 1-3-Cl, -Br, -CN, -NO₂, C_1 - C_4 -alkyl, C_1 - C_4 -alkoxy, C_1 - C_4 -alkylthio, phenoxy, phenylthio, C_1 - C_4 -alkylamino, C_2 - C_4 -dialkylamino or benzoyl,


R_{66} is C_1 - C_6 -alkylene which is unsubstituted or substituted by halogen, -NO₂, -CN, -OH, C_1 - C_4 -alkyl or C_1 - C_4 -alkoxy, R_{67} and R_{68} are each independently of the other hydrogen, C_1 - C_6 -alkyl or C_3 - C_7 -cycloalkyl.

10 Preferably, Ar_4 is phenyl substituted by -Cl, methyl, ethyl propyl, methoxy, ethoxy, propyloxy or nitro, R_{66} is methylene substituted by methyl, ethyl or propyl, and R_{67} and R_{68} are each independently of the other hydrogen, C_1 - C_4 -alkyl or C_5 - C_6 -cycloalkyl.

Preferred catalysts (c) of the instant compositions are sulfonium salts.

Particularly preferred are triphenylsulfonium trifluoromethanesulfonate and the compounds


15

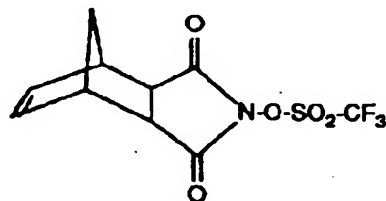

20

25

and

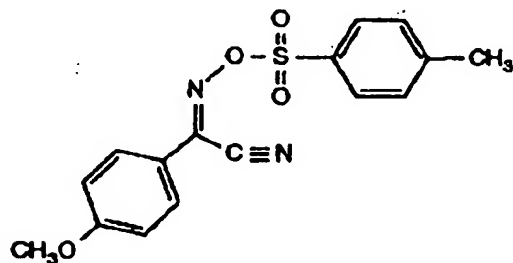

30

35

40 The composition for forming structured color images according to the present invention can generally be prepared simply by mixing the instant components (a), (b) and optionally (c).

Component (a) is chosen according to the color of the regenerated pigment particles.

45 The positive or negative resist-type resin, polymer or prepolymer of component (b) should be chosen according to the kind of desired color images, i.e., positive images or negative images, and the treatment to be applied to the composition, i.e., heat, electromagnetic irradiation such as UV-, visible-, electron-, neutron-, laser- or X-ray irradiation or a combination thereof.

For example, if it is desired to obtain positive images by visible light irradiation, one of the positive resists as classified b1) is chosen. If it is desired to obtain negative images by X-ray irradiation, one of the negative X-ray resists as classified b9) is chosen. If it is desired to obtain negative images by laser irradiation, one of the heat-curable polymers, such as a mixture of methacrylic acid-methyl methacrylate copolymer and methacryloyl chloride-methyl methacrylate copolymer, contained in chemically or thermally effectable polymers as classified b10) is chosen. In the last mentioned case, it is preferred to add, in the polymer, a compound having absorption at the wavelength of the incident laser beam so as to effectively transform optical energy into thermal energy. If it is desired to obtain negative images by applying a combination of heat and electromagnetic irradiation, then such a system as containing poly-p-hydroxystyrene with melamine crosslinker of b10) is chosen. 55 The choice of other resins, polymers or prepolymers, should be done likewise.

If component (c) is not added, components (a) and (b) are compounded at a ratio of from 0.01: 99.99 by weight to 80: 20 by weight, preferably from 1: 99 by weight to 70: 30 by weight, more preferably from 5: 95

by weight to 60 : 40 by weight, and most preferably from 10 : 90 by weight to 50 : 50 by weight.

If component (c) is added, the compounding ratio among components (a) : (b) : (c) is chosen so as to be from 0.01 : 99.98 : 0.01 by weight to 75 : 5 : 20 by weight, preferably from 1.00 : 98.90 : 0.10 by weight to 70 : 15 : 15 by weight, more preferably from 5 : 94 : 1 by weight to 60 : 30 : 10 by weight, and most preferably from 10 : 88 : 2 by weight to 50 : 42 : 8 by weight.

The component (c) is preferably contained in the composition.

The above prepared compositions are preferably diluted with a solvent so as to allow easy coating on a suitable substrate.

Examples of appropriate solvents are ethers, such as tetrahydrofuran and dioxane; glycolethers, such as ethyleneglycol-methylether, ethyleneglycol-ethylether, diethyleneglycol-monomethylether and diethyleneglycol-monoethylether; aprotic solvents, such as acetonitrile, benzonitrile, N,N-dimethylformamide, N,N-dimethylacetamide, nitrobenzene, N-methylpyrrolidone, halogenated aliphatic or aromatic hydrocarbons, such as trichloromethane, benzene unsubstituted or substituted with alkyl, alkoxy or halogen, such as toluene, xylene, anisole and chlorobenzene, and aromatic N-heterocycles, such as pyridine; picoline and quinoline; alcohols, such as methanol, ethanol and diacetone alcohol; carboxylates and lactones, such as propylene carbonate, ethyl acetate, methyl propionate, ethyl benzoate, γ -butyrolactone and γ -valerolactone; sulfoxides, such as dimethyl sulfoxide; sulfones, such as dimethyl sulfone and diethyl sulfone; and ketones, such as dimethyl ketone, methyl ethyl ketone and cyclohexanone and others; water may be used for water-soluble components such as poly(vinyl alcohol).

The composition of the present invention is diluted preferably with one or a mixture of the above solvents so that the solid content thereof is between 1 and 90 wt%, preferably between 5 and 80 wt%, more preferably between 10 and 70 wt%, and most preferably between 20 wt% and 80 wt% based on the solution.

The above prepared solution containing the composition of the present invention is in general applied over an appropriate substrate, subjected to electromagnetic irradiation such as visible-, UV-, laser- or X-ray irradiation, or electron- or neutron irradiation and/or heating, and optionally to development using appropriate developers, so as to form color images for optical- and thermal recording or to fabricate color filters for LCDs.

In another aspect of the present invention, there is provided a method for producing colored patterns or images in which the pattern or image layer is colored with insoluble pigment, locally regenerated from its soluble precursor, including the steps of

- (1) forming a polymer layer containing dissolved pigment precursor using a composition comprising components (a), (b) and optionally (c), and
- (2) locally regenerating the pigment from the above soluble precursor by chemical-, photolytical- or thermal means, by laser or other sources of irradiation.

The expression "forming a polymer layer", as specified in step (1) of the above method, is meant to include a layer covering the whole surface of the substrate as well as a layer which may only cover certain areas of the substrate and which layer was applied imagewise or patternwise, respectively.

One advantageous way to regenerate the pigment in step (2) is by laser marking.

The preparation of the above composition in step (1) is carried out as described in the foregoing text.

As methods for forming polymer pattern or image layers, there are known various techniques like photolithography, impact printing, such as screen printing, gravure printing, flexo printing and offset printing, non-impact printing, such as ink-jet printing, thermal dye diffusion transfer, laser marking, electrodeposition etc.

In photolithography, the above composition is applied over an appropriate substrate by means of a known method, such as spin coating, spraying, dip coating or the like, followed by application of electromagnetic irradiation, such as UV-, visible-, electron-, neutron- or X-ray irradiation and upon necessity, heat.

The kind of electromagnetic irradiation to be applied is chosen according to the resin, polymer or prepolymer of component (b) contained in the composition.

If the resin, polymer or prepolymer of component (b) is a positive or negative resist, then UV- or visible light is used. If the resin, polymer or prepolymer of component (b) is a positive or negative UV resist, then UV light is used.

If the resin, polymer or prepolymer of component (b) is a positive or negative X-ray resist, then X-ray is used. If the resin, polymer or prepolymer of component (b) is a positive or negative electron resist, then electron- or neutron beam is used. If the resin, polymer or prepolymer of component (b) is a photopolymerizable system, then UV- or visible light is used.

The above irradiation is carried out at a conventionally used power and dose, and if necessary, heat is applied subsequently.

The irradiation with electromagnetic light, such as UV- or visible light, or X-ray, or with beams of particles, such as electron- or neutron beams, is usually carried out through an appropriate mask or pattern so as to obtain desired structured color images. Details of such masks or patterns are described, for example, in A.

Relser, Photoreactive Polymers, John Wiley & Sons, New York, 1989.

If laser is used as a UV- or visible light source, no mask is necessary because patterning is achieved by scanning the laser light (Direct Overwrite Technique).

In impact-printing and ink-jet printing, the above composition is transferred to the substrate by screen transfer, flexo transfer, offset transfer, gravure transfer or ink-jetting, followed by application of electromagnetic irradiation, such as UV-, visible-, electron-, neutron- or X-ray irradiation. The criteria for the choice of electromagnetic irradiation are the same as those above. In these methods, no mask or pattern is needed since the composition is transferred to the substrate according to predetermined patterns. If necessary, heat is applied after exposure to electromagnetic irradiation.

In flexo printing, gravure printing and offset printing, it is also possible to transfer the composition after curing. In this method, the composition on a blanket or the like before transfer is exposed to electromagnetic irradiation as above and then transferred to the substrate. Since the composition is hardened in this process, polymer pattern or image layer having sharp image edges are obtained. It is preferred that the substrate is coated with an adhesive polymer so that the cured composition can easily be transferred.

In electrodeposition, the above composition is transferred by electrophoreses or micellar deposition onto the surface of patterned ITO (indium-tin-oxide) electrode formed on the surface of a substrate, followed by application of electromagnetic irradiation as above. The choice of the electromagnetic irradiation is made in the same manner as above. If necessary, heat is applied after exposure to electromagnetic irradiation.

Step (2) is carried out by applying chemical means, heat or electromagnetic irradiation such as UV-, visible-, electron-, neutron-, laser- or X-ray irradiation or a combination thereof to the above prepared polymer pattern or image layer. Preferably laser irradiation is used in this step (2), enabling the most preferred alternative of computer guided laser marking.

For this purpose, in step (1), a substrate is coated with the above composition using spin coating, dip coating or spray coating or the like, followed by application of electromagnetic irradiation, such as UV-, visible-, electron-, neutron- or X-ray irradiation, but without using any mask or pattern, to homogeneously cure the resin, polymer or prepolymer contained in the composition, followed by step (2) using the above laser. The choice of appropriate electromagnetic irradiation is made in the same manner as described above. If necessary, heat is applied after exposure to electromagnetic irradiation.

If the resin, polymer or prepolymer of component (b) contained in the composition is thermally curable, concomitant formation of patterns on the substrate and local regeneration of pigment from its precursor is possible for example by using a NIR laser. It is preferred that a near infrared absorber is contained in the above composition so that laser quantum energy is efficiently transformed to thermal energy.

Although no step of development is mentioned, it may be added according to the application, as in the application to the fabrication of color filters for LCDs. In such a case, conventionally used developers and procedures are applied.

Upon irradiation with electromagnetic light or beams of particles, or application of heat or chemical means in step (2), nano-sized pigment particles are generated in situ, accompanied by a drastic color change, so that formation of pigment-based structured color images with the resolution of 0.5 μm is possible.

The above described method is of wide scope of application, and therefore, can be applied variously to optical- and thermal printing and -recording as well as the fabrication of color filters for LCDs or the like, with higher transparency, higher contrast ratio, higher color purity and strength, higher pattern resolution and precision of image, no (dye) color mixing, no clogging of sleeves during purification of color/polymer mixtures, smoothness of image surface, higher registration accuracy, higher sharpness of image edges, higher thermal, chemical and light stability, and easy production of ultra thin films.

Moreover, since the pigment precursors of the present invention are in general fluorescent, reading out of the recorded information can be achieved not only based on the regenerated pigment, but also based on the fluorescence changes of the pigment precursors and the regenerated pigment remaining in the image forming layer, offering a wider scope of applications of the present invention.

In a further aspect of the present invention, there is provided a method for fabricating a color filter for LCDs including the step of pattern dyeing of a transparent conducting or nonconducting substrate with insoluble pigment particles locally generated from soluble precursors already incorporated into the pattern layer.

The above method in general includes the steps of

- (1) forming a polymer layer containing dissolved pigment precursor on a transparent substrate using a composition comprising components (a), (b) and optionally (c), and
- (2) locally regenerating the pigment from the above soluble precursor by chemical-, photolytical- or thermal means, or by laser or other sources of irradiation, or a combination thereof; and
- (3) repeating the above steps (1)-(2) three times with changing pigment precursor so that colored patterns of blue, green and red are obtained.

Since the fabrication of color filters for LCDs is a process of producing structured color images, the above described method for producing colored patterns or images can be directly applied, but repeating three times with changing pigment precursors so as to obtain color patterns of blue, green and red on the same substrate.

The steps (1) and (2) are the same as those of the method for producing colored patterns or images.

Accordingly, photolithography, impact printing, such as screen printing, flexo printing, gravure printing and offset printing, non-impact printing, such as electrodeposition, ink-jet printing, laser marking and other techniques can be applied for embodying the method. A preferred embodiment is the fabrication of color filters for LCDs via laser marking.

Photolithography includes single-layer process and double layer process.

In single layer process, coated ITO (indium-tin-oxide) as the above transparent substrate is coated with the composition as above containing precursor of blue, green or red pigment and a resist, followed by electromagnetic irradiation through an appropriate mask or pattern to achieve structure patterning in step (1). In step (2), pigment regeneration from the pigment precursor is carried out, and upon necessity, the portion of the composition in which pigment is not regenerated is removed by using an appropriate developer. In steps (1) and (2), mosaic- or stripe-like colored pattern is obtained. This process is repeated three times with changing pigment precursor so as to fabricate a color filter of blue, green and red colors.

In double layer process, coated ITO as the above transparent substrate is coated with the composition as above containing precursor of blue, green or red pigment and a thermo-setting prepolymer, which is further coated with a colorless resist, followed by electromagnetic irradiation through an appropriate mask or pattern to achieve structure patterning in step (1). In step (2), pigment regeneration from the pigment precursor and crosslinking of pigmented pre-polymer are carried out, and the top resist layer is removed using an appropriate developer. In steps (1) and (2), mosaic- or stripe-like colored pattern is obtained. This process is repeated three times with changing pigment precursor so as to fabricate a color filter of blue, green and red colors.

In impact printing method, the composition as above is transferred in the desired pattern to the transparent substrate, which is exposed to electromagnetic irradiation or heat to achieve structure curing in step (1). Herein, if the composition is cured before transfer in gravure printing, flexo printing or offset printing, the composition does not need to be exposed to electromagnetic irradiation. Pigment regeneration is carried out in step (2), wherein no development is necessary because the ITO is coated with the composition only at desired positions. This process is repeated three times with changing pigment precursor so as to fabricate a color filter of blue, green and red colors.

In the laser marking method, the transparent substrate is coated with the composition as above, and upon necessity, followed by exposure to electromagnetic irradiation or heat in step (1). The pigment regeneration in step (2) is achieved by using a computer-guided laser equipment. If the resin, polymer or prepolymer contained in the composition is a thermally curable resin, concomitant patterning and regeneration of pigment is possible in step (1) and (2). This process is repeated three times with changing pigment precursor so as to fabricate a color filter of blue, green and red color.

In the electrodeposition method, the composition as above is transferred onto the surface of patterned ITO as the above transparent substrate by electrophoresis, micellar deposition or the like, followed by exposure to electromagnetic irradiation or heat in step (1). Pigment regeneration is carried out in step (2), wherein development is not necessary. This process is repeated three times with changing pigment precursor so as to fabricate a color filter of blue, green and red color.

In order to achieve the desired image formation, in certain applications it may not be necessary to use the aforementioned component (b) of the instant compositions. In such cases any kind of known high molecular weight organic binder material may be used as component (b'), said binder material fulfilling the function of appropriately fixing instant component (a), the soluble pigment precursor, on the substrate on which a colored pattern or image should be produced.

Accordingly, a further subject of the invention is a method for producing colored patterns or images including the steps of

(1) forming a polymer layer containing a dissolved pigment precursor component (a), a high molecular weight organic binder material (b') and optionally (c), and

(2) locally regenerating the pigment from the above soluble precursor by chemical, photolytical or thermal means, or by laser or other sources of irradiation.

Examples of appropriate high molecular weight organic binder materials are polymers based on vinyl compounds, such as polystyrene, poly- α -methylstyrene, poly-p-methylstyrene, poly-p-hydroxystyrene, poly-p-hydroxyphenylstyrene, polyacrylates such as poly(methyl acrylate), poly(acrylamide) and the corresponding methacrylic compounds, poly(methylmaleate), poly(acrylonitrile), poly(methacrylonitrile), poly(vinyl chloride), poly(vinyl fluoride), poly(vinylidene chloride), poly(vinylidene fluoride), poly(vinyl acetate), poly(vinyl alcohol), poly(methylvinylether) and poly(butylvinylether);

polyesters such as particularly polyethylene terephthalate, polycarbonates, polyolefins such as polyethylene and polypropylene, and polyalkadienes such as polybutadiene;

or copolymers of two or more of these compounds such as ABS or poly(vinyl chloride / vinyl acetate / vinyl alcohol);

- 5 novolacs derived from a C₁-C₆-aldehyde, e.g., formaldehyde and acetaldehyde, and a dinuclear, preferably mononuclear, phenol which may optionally be substituted by one or two C₁-C₆-alkyl groups, by one or two halogen atoms or by one phenyl nucleus, such as o-, m- or p-cresol, xylenol, p-tert.butylphenol, o-, m- or p-nonylphenol, p-chlorophenol or p-phenylphenol, or those with more than one phenolic group, such as resorcin, bis-(4-hydroxyphenyl)methane or 2,2-bis-(4-hydroxyphenyl)propane;

- 10 polymers formed from maleimides and/or maleic anhydrides, for example, copolymers from maleic anhydride and styrene;

poly(vinyl pyrrolidone);

biopolymers and their derivatives, such as cellulose, starch, chitin, chitosan, gelatine, zein, cellulose derivatives, for example ethylcellulose, nitrocellulose, celluloseacetate and cellulosebutylate;

- 15 and natural and synthetic resins, such as rubber, waxes, casein, silicon, silicone resins, urea- and melamine-formaldehyde resins, alkyd resins, phenolic resins, polyamides, polyaramides, polyimides, polyamide/imides, polysulfones, polyethers such as polyphenylene oxides, polybutyral, polyethersulfones, polyurethanes, polyureas, polyarylenes, polyarylenesulfides, epoxy resins such as polyepoxides.

- Preferred binder materials (b') are polymers based on vinyl compounds, novolacs, biopolymers, polyimides, polyesters, polycarbonates, polybutyral and mixtures thereof.

- There are different ways to perform step (1) of forming a polymer layer containing a dissolved pigment precursor component (a), a high molecular weight organic binder material (b') and optionally (c). One way is for example to use a composition containing all the desired components. Another is to prepare a receiver layer containing no pigment precursor (a), onto which the pigment precursor (a) is applied afterwards for example by ink-jetting an ink containing the pigment precursor (a) or preferably by thermal dye diffusion transfer from a donor material containing the pigment precursor (a).

- Thermal dye diffusion transfer is a technology not to be confused with technologies based on mordants or chemical reactivity, where silver compounds (like in instant photography where a thermal development may be included) or colour formers (for example lactones which need a reactive partner - usually an acid or a phenol - in the receiver) are involved, though scientists still disagree on the terminology or use it improperly. A description can be found for example in Spec. Publ. - R. Soc. Chem. 133/pp. 73-85 (1993), Proc. SPIE-Int. Soc. Opt. Eng. 1912/pp. 252-260 (1993), Nippon Shashin Gakkaishi 55(6)/pp. 456-464 (1992), Journal of Imaging Technology 16(6)/pp. 238ff (1990) and many other publications.

- The principle of thermal dye diffusion transfer is the following: a thin donor sheet (usually 1-10 µm) containing the dye is brought in contact with a receiver material, then heat is generated in a way such that the desired quantity of dye transfers to selected target areas. This can be achieved by simple heating of a broad area, but usually electronically controlled thermal array heads moving across the back surface of the donor are used. Alternatively, a high-intensity light flash (EP-391303, EP-529362) through a screen or a laser source (Proc. SPIE- Int. Soc. Opt. Eng. 1912/p. 261 ff. [1993]) can be used; preferably a laser beam focussed onto the donor is used as an energy source; in this case, the donor layer preferably contains IR dyes which convert the light into heat, the laser is an IR laser (as in EP-529561) and extremely high resolutions can be obtained.

- Thus, thermal dye diffusion transfer is a completely dry process totally under electronic control, leading as desired to continuous or full tone images in mosaic pixel patterns, such as needed for electronic photography printouts, color proofing and especially colour filters for LCD's.

- 45 The present soluble pigment precursors (a) are known to decompose thermally at temperatures below 200°C, for example N,N'-bis-tert.-butoxycarbonyl-1,4-diketo-3,6-diphenyl-pyrrolo-[3,4-c]pyrrole starts to decompose at 150°C (peak at 175°C) and is totally converted to 1,4-diketo-3,6-diphenyl-pyrrolo-[3,4-c]pyrrole in less than 10 min at 180°C. In thermal dye diffusion transfer, the temperature raises well above the glass transition point of the receiver; practically, printers work at temperatures above 230°C, typically the surface of the thermal head reaches 350°C. Thus, it had to be expected that upon printing the pigment precursors (a) would decompose within the donor, what would inhibit their transfer to the receiver; but highly surprising, it has now been found that they can be transferred thermally without any apparent decomposition.

- Accordingly, further subjects of this invention are methods for producing colored patterns or images including the steps of

- 55 (1) forming a polymer layer containing a dissolved pigment precursor component (a), a high molecular weight organic binder material (b') and optionally (c), and
(2) locally regenerating the pigment from the above soluble precursor by chemical, photolytical or thermal means, or by laser or other sources of irradiation.

where step (1) is accomplished by :

- forming a polymer layer containing dissolved pigment precursor using a composition comprising component (a) and (b') a high molecular weight organic binder material and optionally (c),
- 5 - (1a) forming a polymer layer containing a high molecular weight organic binder material (b') and optionally (c), then (1b) ink-jetting an ink comprising a pigment precursor (a) onto the polymer layer in selected target areas, or
- (1a) forming a polymer layer containing a high molecular weight organic binder material (b') and optionally (c), then (1b) superposing a donor layer comprising a pigment precursor (a) and a high molecular weight organic binder material (b') onto the polymer layer, (1c) locally heating the donor layer to transfer the dye in selected target areas, and (1d) removing the donor layer from the receiver layer.

10 All the aforementioned embodiments described above for using instant components (a) in a method for producing colored patterns or images also pertain to the corresponding method where components (b') are used instead of components (b).

15 All the aforementioned embodiments described above for using instant components (b) in a method for producing colored patterns or images generally also pertain to the corresponding method where components (b') are used instead of components (b), as long as the compositions of step (1) are prepared by forming a polymer layer containing dissolved pigment precursor using a composition comprising component (a) and (b') a high molecular weight organic binder material and optionally (c).

20 When the compositions of step (1) are prepared by ink-jetting an ink comprising a pigment precursor (a) onto a polymer layer in selected target areas, preferably the polymer layer is poly(vinyl alcohol) and the ink comprises 0.5 to 10% of the pigment precursor (a) in a hydrophilic solvent; most preferably, the ink consists essentially of 1 to 5% of the pigment precursor (a) in a polar solvent mixture comprising ethylene glycol or diethylene glycol.

25 When the compositions of step (1) are prepared by thermal dye diffusion transfer from a donor layer comprising a pigment precursor (a) onto a polymer layer in selected target areas, preferably the receiver polymer layer is polyester, poly(vinyl chloride / vinyl acetate), polycarbonate or a mixture thereof, the donor layer contains 1 to 10% of the pigment precursor (a) in a different binder and the binders used for the donor and receiver layers are different; most preferably, the receiver polymer layer is coated as a 10 to 20 wt% solution and contains 0.1 to 5 wt% of surfactants, and the donor's binder consists essentially of polybutyral or cellulose derivatives. Further details concerning the donor's and receiver's preferred chemical compositions are well-known to specialists and are subject of many patents and other publications (such as in EP-507734 and EP-508954). The donor may be re-used many times, and the relative motion of donor and receiver may be varied, for example in order to increase the colour intensity. Usually, the donor is just peeled off after the transfer step, but it may be useful in some cases to remove it partially or totally by chemical dissolution.

30 Polymeric layers containing dissolved pigment precursor components (a), high molecular weight organic binder materials (b') and optionally (c) have similar properties as positive or negative resist-type resins, polymers or prepolymers (b) after structuration and may be used in replacement.

35 Accordingly, the present invention provides a method for fabricating a color filter for LCDs including the step of pattern dyeing of a transparent conducting or nonconducting substrate with insoluble pigment particles locally generated from soluble precursors already incorporated into the pattern layer.


40 The above method in general includes the steps of
 (1) forming a polymer layer containing a dissolved pigment precursor component (a), a high molecular weight organic binder material (b') and optionally (c),
 (2) repeating the above step (1) three times with changing pigment precursor so that colored patterns of
 45 blue, green and red are obtained in step (3), and
 (3) locally regenerating the pigment from the above soluble precursor by chemical-, photolytical- or thermal means, or by laser or other sources of irradiation, or a combination thereof.

Examples

Example 1A


50 27.94 g di-tert-butyl-dicarbonate is added in 3 portions at 1 hour time interval to a mixture of 3.23 g 4-dimethylaminopyridine and 14.75 g 1,4-diketo-3,8-diphenyl-pyrrolo-[3,4-c]pyrrole in 500 ml of tetrahydrofuran dried over molecular sieves. The resulting red suspension is stirred at room temperature for 2 hours in a dry atmosphere until a green solution is obtained. The solvent is evaporated under reduced pressure and the yellow residue washed with 5% aqueous sodium bicarbonate solution and with water, then dried under vacuum. 24.5 g N,N'-bis-tert-butoxycarbonyl-1,4-diketo-3,6-diphenyl-pyrrolo-[3,4-c]pyrrole (DPP-BOC) is obtained.

¹H-NMR (δ, CDCl₃): 1.40 (s, 18H); 7.48-7.50 (m, 6H); 7.75 (d, 4H)

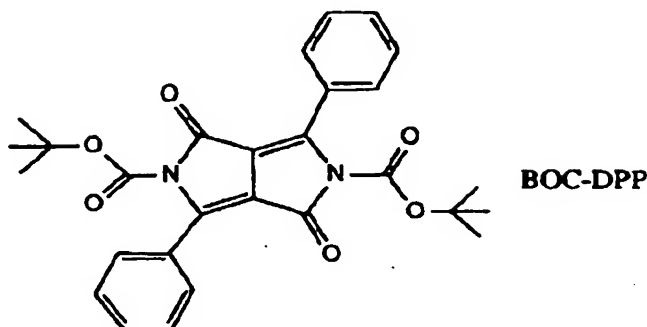

Example 18: Pyrrolopyrrole-butoxycarbonyl for Color Image Application

A formulation containing 2.00 g of poly-p-hydroxystyrene (PHM-C, Maruzen), 0.80 g of N,N'-bis-tert-butoxycarbonyl-1,4-diketo-3,6-diphenyl-pyrrolo-[3,4-c]pyrrole (BOC-DPP) from example 1A, 466 mg of a melamine crosslinker (Cymel 303), 106 mg of i-line photo acid former 4-methoxy-α-(((4-methylphenyl)sulfonyl)oxy)imino)-benzeneacetonitrile as shown below and 8.00 g of cyclopentanone is prepared (formulation 1).

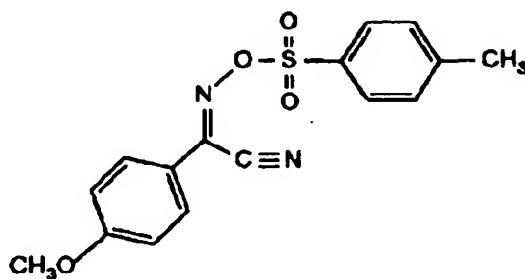

i-line photo acid former

Another formulation containing 2.00 g of poly-p-hydroxystyrene (PHM-C, Maruzen), 472 mg of freshly milled, dispersed 1,4-diketo-3,6-diphenyl-pyrrolo-[3,4-c]pyrrole, 466 mg of melamine crosslinker (Cymel 303), 106 mg of i-line photo acid former as above and 8.00 g of cyclopentanone is prepared (formulation 2) as a comparative sample.

Each of the above formulations is spin-coated on a 3-inch silicon wafer or a 1-inch quartz wafer at a rotation of 4000 rpm, followed by drying on a hot plate at 100°C for 60 seconds. The films obtained from formulation 1 are clear and pale yellow colored, and show a smooth surface, while those obtained from formulation 2 are turbid and show rough surface. The films obtained from both of formulations 1 and 2 are irradiated using a mercury vapour lamp through a 365 nm interference filter and a chromium-quartz mask at a power of 50 mJ/cm². The films are then heated on the hot plate at 120 °C for 60 seconds and developed for 20 seconds in OPD 262 (2.38 % aqueous solution of tetramethylammonium hydroxide). The films from formulation 1 are subsequently heated at 150°-200°C for 15-120 seconds (sample A : 30 sec. at 170°C, sample B : 30 sec. at 195°C, and sample C : 120 sec. at 150°C).

Structuring is possible for both of the formulations 1 and 2. However, while the films from formulation 1 allow structuring without any residue and permit a resolution of as high as 0.6 μm, formulation 2 does not allow any residue free resolution of higher than ca. 50 μm.

The color intensity of films from formulation 1 and 2 are similar. But, while the films from formulation 1 are clear by visual observation, those from formulation 2 are turbid. Furthermore, no pigment cluster is recognized by raster electron microscope in the films from formulation 1.

In addition, it is possible to form a plurality of overlapping film layers, wherein no interaction of the upper,

new layer with the already existing, under layer is recognized.

Example 2: Laser Direct Write Technique

The above formulation 1 is spin-coated on a silicon disk and dried, whereby a film having a thickness of 1.4 microns is obtained. This film is then irradiated line forming-wise using an argon laser at 364 nm (distance : 85 mm, power : 0.30 nW, and irradiated area per second : 0.6 mm²), heated at 120°C for 1 minute, developed in a 2.38 % aqueous solution of tetramethylammonium hydroxide and finally heated at 170°C for 1 minute.


A red film remains at positions which are overwritten with the laser, and the other zones are removed by the developer. The resolution is of order of 20 µm.

Example 3: Generation of Fluorescence Pattern by Irradiation

A solution composed of 2.00 g of polystyrene (Aldrich, $M_w = 280,000$), 500 mg of N,N'-bis-tert.-butoxycarbonyl-1,4-diketo-3,6-diphenyl-pyrrolo-[3,4-c]pyrrole of example 1A and 125 mg of triphenylsulfoniumtriflate, dissolved in 10 g of cyclopentanone, is spin-coated on a 1-inch quartz wafer. After drying at 100°C for 60 seconds, a homogeneous film of 1.2 µm in thickness is obtained. This film is irradiated picture-wise through a chromium-quartz mask (30 mJ/cm², 254 nm) and then heated at 130°C for 60 seconds, whereby intensive red-coloring appears at the zones irradiated previously, with which the fluorescence behaviour changes. The thus obtained fluorescence pattern has resolution of as high as 0.5 µm. In contrast to this, no change is observed, i.e., the film remains pale yellow, in the zones which are not irradiated.

Example 4: Indigo-butoxycarbonyl for Color Filter Application

A solution analogous to the formulation 1 of example 1B is prepared, wherein the butoxycarbonyl-modified Indigo as shown below is used instead of N,N'-bis-tert.-butoxycarbonyl-1,4-diketo-3,6-diphenyl-pyrrolo-[3,4-c]pyrrole.

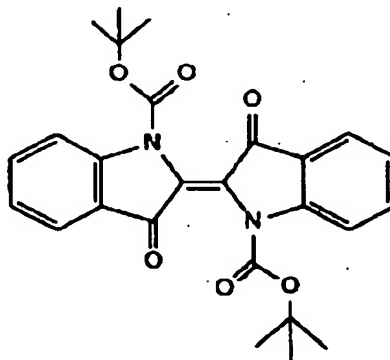

After spin-coating on a quartz wafer, a 1.2 µm thick, orange film is obtained. The processing is carried out analogously to that described above for the diketopyrrolopyrrole. The irradiated resist zone is colored blue and remains on the substrate after development.

Example 5: Thermal Recording Technique

A thermal recording foil is prepared by casting a 200 µm thick film consisting of a solution of 2.0 g of polystyrene, 200 mg of BOC-DPP and 100 mg of dibenzylphenyl sulfonium hexafluoro antimonate, dissolved in 5 g of chlorobenzene, on a 3M PP 2500 overhead foil. After air-drying for 6 hours the polystyrene film containing the latent pigment is about 70 µm thick and tackfree.


This thermal recording foil is then irradiated with an argon laser (15 mm out of focus, 488 nm single, 100 mW) with writing speed of 100, 50 and 25 mm/sec. For all speeds a clearly visible, orange image is created immediately after the laser write. The intensity of the orange color is dependent on the writing speed of the laser and is most intense at the lowest speed.

Example 6: Thermal Recording Technique

A thermal recording foil is prepared analogously to example 5, but with a film which does not contain the sulfonium salt. The foil is irradiated with an argon laser (in focus, 488 nm single, 100 mW, 50 mm/sec). The zones which have been irradiated with the laser turn orange immediately after the laser write.

Example 7

A formulation composed of 1.8 g novolak (28% p-cresol, 78% m-cresol, $M_n=1700$, $M_w=8895$), 0.24 g melamine crosslinker (cymel 303), 0.50 g bisphenol-A, 65 mg photo acid former from example 1, and 0.70 g of latent pigment LPR 177, dissolved in 8.4 g cyclopentanone, was prepared.

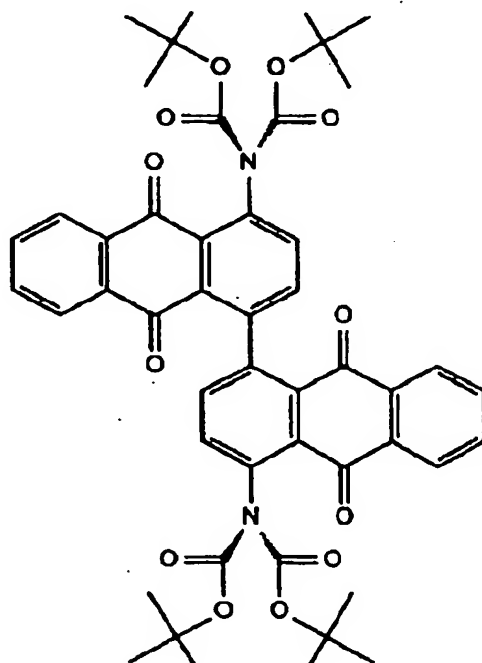**LPR 177**


The formulation was spin-coated on a 7.5×7.5 cm Corning 7059 type glass substrate (2000 rpm) and dried on a hot-plate at 100°C for 60 seconds. The resulting film is irradiated with a dose of $30 \text{ mJ}/\text{cm}^2$ as in example 1B. The film was then heated on the hot plate for 60 seconds at 120°C and subsequently developed for 60 seconds in 1N aqueous NaOH developer, leaving behind structures which form a negative tone image of the mask. The glass substrate containing the micropatterns is finally baked at 150°C for 2 hours, yielding highly transparent micropatterns of red color.

Example 8


A formulation is prepared by dissolving 1.0 g of a copolymer of methacrylic acid and benzylmethacrylate (obtained by free radical induced polymerization (AIBN, toluene, 20 hours at 70°C , $M_n=8500$, $M_w=35000$) of the corresponding monomers, 0.7 g dipentaerythritol-monohydroxy-pentaacrylate (SR 399 from Sartomer Inc.), 0.2 g of LPR 177 and 0.1 g Irgacure 369 (Ciba-Geigy Inc.), dissolved in 7 ml 1-methoxy-2-propyl-acetate. The formulation is spin-coated on 1 inch quartz wafers and dried on a hot-plate for 60 seconds at 100°C . The resulting films are exposed as in example 1 with a dose of $70 \text{ mJ}/\text{cm}^2$ and subsequently developed for 60 seconds in OPD 262 developer, yielding micropatterns which form a negative image of the mask. The quartz wafers are then heated for 2 hours at 150°C , leading to colored microstructures.

Example 9

A formulation is prepared analog to example 7, but latent pigment LPV 353 is used instead of LPR 177, and the materials are dissolved in 12 ml cyclopentanone. This formulation is imaged in the same way as in example 7, leading to micropatterns of violet color.

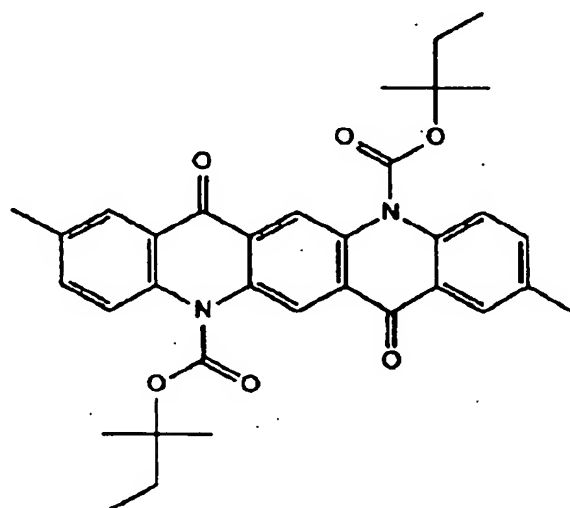**LPV 353****Example 10A**

0.07 g 4-dimethylaminopyridine is added to a mixture of 0.37 g C.I. Pigment Yellow 139 and 1.64 g di-tert-butyl-dicarbonate in 20 ml of N,N-dimethylformamide dried over molecular sieves. The resulting orange-colored suspension is stirred at room temperature for 7 days, then poured into 60 ml of water under cooling and good stirring for 30 min. The crude filtration residue is treated with 10 ml of methanol and filtered to remove the insoluble part. 50 ml of water are then added to the filtrate. The precipitate is collected and dried at room temperature under vacuum. 0.50 g product is obtained, which consist of a mixture of components of idealized formula (LPY 139).

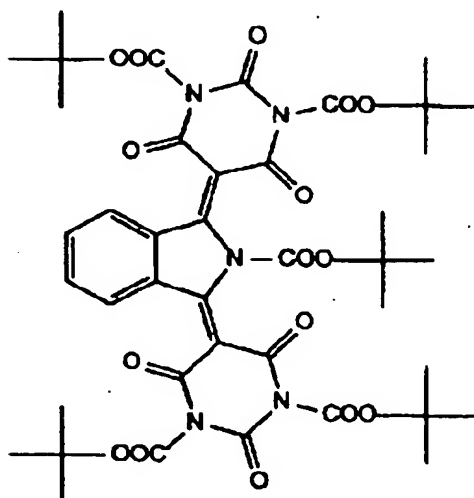**LPY 139**

Determined by thermogravimetric analysis (sudden weight loss at 180°C), the number of tert-

butyloxycarbonyl groups is 4.3, showing the desired partial reaction.

Example 10B

5 A formulation is prepared and processed analog to example 7, but the crude product from example 10A is used instead of LPR 177, leading after a final baking step at 150°C for 2 hours microstructures of yellow color.

Example 11

10 A formulation is prepared and processed analog to example 7, but 1.1 g LPY 139 and 1.1 g LPV 353 are used instead of 2.2 g LPR 177, leading after a final baking step at 150°C for 2 hours micropatterns of violet color.

Example 12

15 A formulation consisting of 1.6 g polystyrene (Aldrich, 18,242-7, Mw=280'000), 0.4 g BOC-DPP, 0.1 g tri-phenylsulfonium triflate and 8.0 g cyclopentanone was prepared. This formulation was spin-coated onto a 1 inch quartz wafer (2500 rpm) and dried on a hot plate for 1 minute at 100°C, yielding a homogeneous yellow film. This wafer is then irradiated through a mask analog to example 1 and finally heated for 2 minutes at 135°C. The zones of the film which have been irradiated turned red, whereas the unirradiated zones stayed yellow, generating highly resolved (submicrometer resolution) color patterns of the mask in the film.

Example 13

20 Films on quartz disks were prepared analog to example 12. These films were irradiated with a laser analog to example 5 (laser speed 250 mm/sec) and subsequently tempered at 135°C for 1 minute. Analog to example 12, the irradiated zones turned red, whereas the nonilluminated zones remained yellow.

Example 14A : Thermal Dye Diffusion Transfer

The following substances are introduced into a 5 ml pill bottle:

500 mg	®Vylon 600 linear high molecular	weight polyester (Toyobo)
25 mg	®KF-393	amino-modified silicone (Shinetsu)
25 mg	®X-22-343	epoxy-modified silicone (Shinetsu)
55 mg	p-toluene sulfonic acid	acidic catalyst
1531 mg	methyl ethyl ketone	p.a. (Merck)
1531 mg	toluene	p.a. (Merck)

45 The bottle is sealed with a polyethylene stopper and then mechanically agitated at room temperature (20 to 25°C) for 14 hours. The solution obtained is then cast with a 24 µm draw bar onto a film of white polyethylene terephthalate ®U-6 (Teijin) at 12 cm/s speed.

The fresh casts are dried at 20 to 25°C for 24 hours, then heated at 150°C in an oven for 30 minutes; finally, rectangles of 110 × 132 mm in size are cut out of the central portions to obtain ready-to-print receiver sheets.

50 116 mg N,N'-bis-tert-butoxycarbonyl-1,4-diketo-3,6-diphenyl-pyrrolo-[3,4-c]pyrrole and 105 mg poly-(vinyl butyral) are dissolved in 1.35 g toluene, 1.35 g methyl ethyl ketone and 100 mg ethanol in a 5 ml pill bottle sealed with a polyethylene stopper by mechanical agitation at room temperature (20 to 25°C) for 14 hours. The solution obtained is then cast with a 12 µm draw bar onto a 6 µm thick film of heat-resistant transparent polyethylene terephthalate at a linear speed of 12 cm/s. The fresh casts are sequentially dried at 50°C for 3 minutes and 80°C for 5 minutes, then rectangles of 103 × 190 mm in size are cut out of the central portions and mounted with tape into ®SV-100 (Kodak) colour printing cassettes instead of the original yellow film portions to give ready-to-print donor ribbon.

Prints with uniformly coloured, yellow areas corresponding to the relative print intensities 0 (minimum den-

sity), 26, 51, 77, 102, 128, 153, 179, 204, 230 and 255 (maximum density) are then made on an ©SV-6550 Color Video Printer (Kodak) using the receiver and donor described above. Digitally stored images are used for this purpose.

5 The optical density "D₀" of the bright yellow step-wedge patterns which are obtained is determined on a ©TR924 Macbeth densitometer by reflectance measurements with status A filters (blue, green and red channels). The CIELAB colorimetric coordinates are measured on an ©Elrepho 2000 D65/10° (Datacolor) instrument.

10 The patch of maximal intensity has a blue reflectance density of 1.08, a green reflectance density of 0.02 and colorimetric coordinates of L* = 101.40, a* = -28.2 and b* = 87.3.

Example 14B

15 The yellow print of example 14A is gradually heated up to finally 150°C for 15 minutes. A colour change to orange-red is observed. The patch of maximal intensity has a blue reflectance density of 0.56, a green reflectance density of 0.82 and colorimetric coordinates of L* = 65.95, a* = 47.6 and b* = 9.3.

Example 14C

20 The samples are tested for their fading resistance through irradiation under window glass in an Atlas Ci35 with a light intensity of 80 kLux until the desired exposure energy level of xx kJ/cm² is reached. Then the optical density D₀^{xx} is determined for the blue, green and/or red channel and the ratio [(D₀-D^{xx})/(D₀ × 0.01)] is used to determine the degree of fading -DD_{Channel 0,1}^{xx} in % given an initial density of D₀ before exposure.

25 The unheated yellow print of example 14A and the orange-red print of example 14B heated at 150°C for another 15 minutes are irradiated until the exposure energy level of 60 kJ/cm² is reached. The yellow print of example 14A fades almost immediately and completely (-DD_{blue,0.1}¹⁵ = 96%), while the orange-red print of example 14B almost immediately turns red as residues of N,N'-bis-tert.-butoxycarbonyl-1,4-diketo-3,6-diphenyl-pyrrolo-[3,4-c]pyrrole fade, then does not change significantly anymore (-DD_{green,0.1}¹⁵ = 8%), due to the excellent light-fastness of the transparent 1,4-diketo-3,6-diphenyl-pyrrolo-[3,4-c]pyrrole pigmentary form.

Example 15A

30 Bar coatings are made as in example 14A, but with ©UCAR VAGH (Union Carbide) vinyl resin instead of ©Vylon 600 polyester resin. The dry casts are heated at 120°C in an oven for 15 minutes and cut as above to obtain ready-to-print receiver sheets. Prints are then made using identical donor and printing conditions as in example 14A.
Bright yellow step-wedge patterns are obtained.

Example 15B





40 The yellow print of example 15A is heated at 120°C for 25 minutes. A colour change to orange-red is observed like in example 14A.

Examples 16-20

45 It is proceeded in analogy to example 14, with the difference that the samples are directly heated at 150°C for 25 minutes, with the formulations and the results shown below:




50

55

example	catalyst		D _{green} (after heating)
16	55 mg		1.16
17	55 mg		1.09
18	none		0.38
19	27 mg		0.78
20	55 mg		1.18

Examples 21-23

It is proceeded in analogy to example 15, with the formulations and the results shown below:

example	catalyst		D _{green} (after heating)
21	55 mg		1.21
22	27 mg		0.54
23	55 mg		1.08

Claims

1. A composition for making structured color images comprising
 - (a) a soluble pigment precursor which can be transformed to an insoluble pigment by means of chemical-, thermal-, photolytic- or radiation-induced method, and
 - (b) a positive or negative resist-type resin, polymer or prepolymer which can be structured by cross-linking, polymerization or depolymerization by applying heat or electromagnetic irradiation.
2. A composition for making structured color images comprising
 - (a) a soluble pigment precursor which can be transformed to an insoluble pigment by means of chemical-, thermal-, photolytic- or radiation-induced method, and
 - (b') a high molecular weight organic binder material (b').


3. A composition according to claims 1 or 2, wherein said pigment precursor (a) is represented by formula I



wherein x is a number from 1 to 4,

A is the residue of a colorant of the quinacridone-, anthraquinone-, perylene-, indigo-, quinophthalone-, isoindolinone-, isoindoline-, dioxazine-, diketopyrrolopyrrole- or azo series, which is bound to x groups B via N atoms, which nitrogens are part of A,

B is a group bound to A, represented by formulae



or



and wherein in formulae II, III and IV

m, n and p are each independently of the other 0 or 1,

X is C₁-C₄-alkylene or C₂-C₆-alkenylene,

Y is a group -V-(CH₂)_q-,

Z is a group -V-(CH₂)_r-,

V is C₃-C₆-cycloalkylene,


q is a number between 1 and 8,

r is a number between 0 and 6,

R₁ and R₂ are each independently of the other hydrogen, C₁-C₆-alkyl, C₁-C₄-alkoxy, halogen, CN, NO₂, phenyl or phenoxy which are unsubstituted or substituted by C₁-C₄-alkyl, C₁-C₄-alkoxy or halogen,

Q is hydrogen, CN, Si(R₄)₃, a group C(R₆)(R₆)(R₇), wherein R₆, R₆ and R₇ are each independently of the other hydrogen or halogen and at least one of the residues R₆, R₆ and R₇ is halogen,

a group




wherein R₁ and R₂ have the same meaning as given above,


a group SO₂R₈ or SR₈, wherein R₈ is C₁-C₄-alkyl,

a group CH(R₉)₂, wherein R₉ is phenyl which is unsubstituted or substituted by C₁-C₄-alkyl, C₁-C₄-alkoxy or halogen, or

a group of formula



5

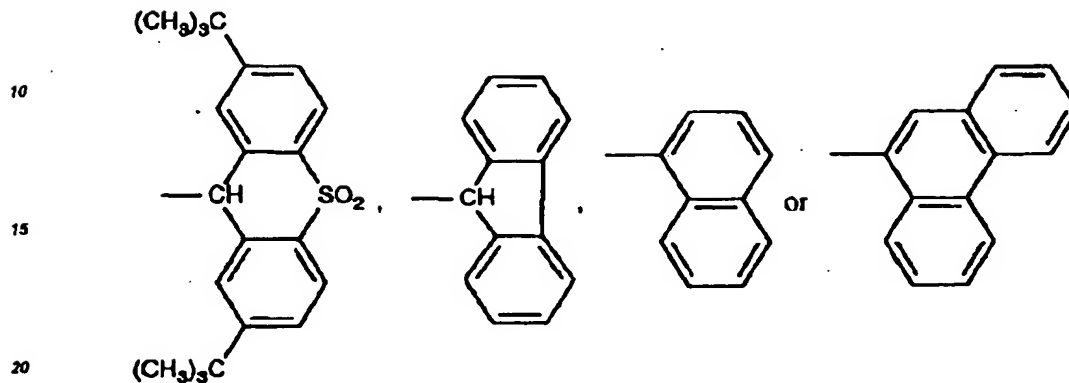


10

15

20

and R_3 and R_4 are each independently of the other hydrogen, C_1 - C_{18} -alkyl or a group

25



30

wherein X, Y, R_1 , R_2 , m and n have the above given meaning, or R_3 and R_4 together with the nitrogen, on which they are bound, form a pyrrolidinyl-, piperidinyl- or morpholinyl residue, and wherein $A(B)_x$ may contain additional

35




40

=N-, -NH- or -NH₂ groups.

4. A composition according to claims 1 or 2, wherein x is 1 or 2 and B is a group of formula

45




50



55


and, if x is 2, one of the B residues may also be hydrogen, wherein in formulae IV, V and VI, m is 0 or 1, X is C_1 - C_4 -alkylene or C_2 - C_5 -alkenylene,

R_1 and R_2 are each independently of the other hydrogen, C_1 - C_4 -alkyl, methoxy, chloro or NO_2 , and Q is hydrogen, CN, CCl_3 , a group



10 SO_2CH_3 or SCH_3 , and



R_3 and R_4 in formula IV are each independently of the other hydrogen, C_1 - C_4 -alkyl or a group




or

R_3 and R_4 together form a piperidinyl residue with the nitrogen atom they are attached to.


- 20 5. A composition according to claims 1 or 2, wherein x is 2 and B is a group of formula



- 35 6. A composition according to any of claims 1 to 3, wherein the compound of formula I is

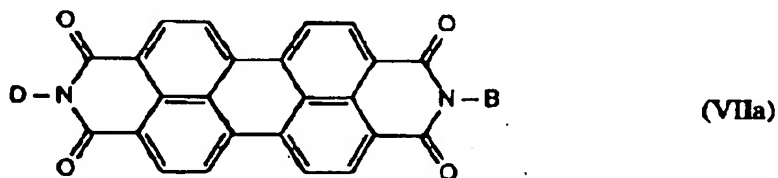


or

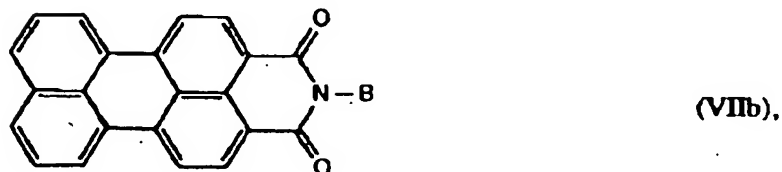

55 wherein D is hydrogen, C_1 - C_6 -alkyl, phenyl, benzyl or phenethyl which are unsubstituted or substituted by halogen or C_1 - C_4 -alkyl, or is the same as B, and B is a group as defined in claim 3; or


wherein the compound of formula I is a quinacridone of formula

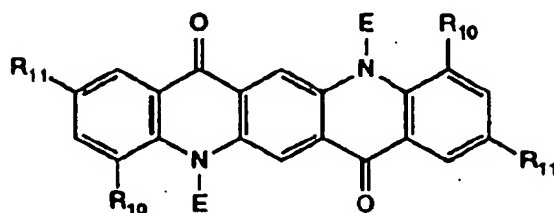

(VIII),

wherein R_{10} and R_{11} are each independently of the other hydrogen, halogen, C_1 - C_{18} -alkyl, C_1 - C_4 -alkoxy or phenyl, and E stands for hydrogen or for B, with the proviso that at least one E stands for B; or


wherein the compound of formula I is a dioxazine of formula

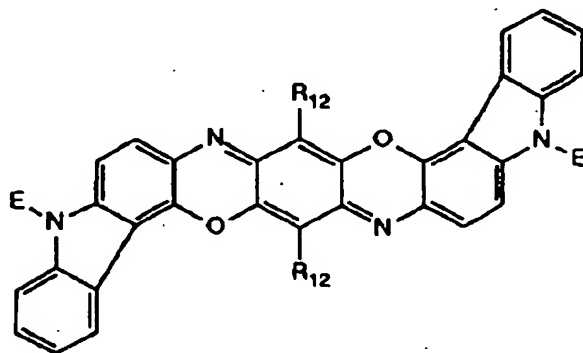


(IX),

wherein R_{12} is hydrogen, halogen or C_1 - C_{18} -alkyl, and E stands for hydrogen or for B, with the proviso that at least one E stands for B; or


wherein the compound of formula I is an isoindoline of formula



(X)

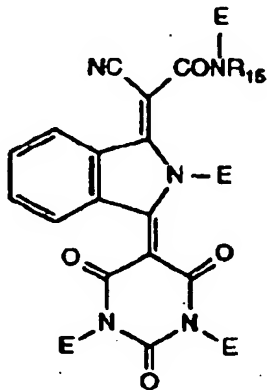

(XI)

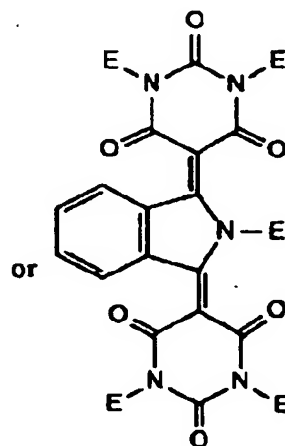

(XII)

wherein R_{13} is a group



R₁₄ is hydrogen, C₁-C₁₅-alkyl, benzyl or a group



R₁₅ has the same meaning as R₁₃.

R₁₆, R₁₇, R₁₈ and R₁₉ are each independently of the other hydrogen, C₁-C₁₅-alkyl, C₁-C₄-alkoxy, halogen or trifluoromethyl, and E stands for hydrogen or for B, with the proviso that at least one E stands for B and at least one E in formula XII stands for H; or


wherein the compound of formula I is an indigo derivative of formula



(XIII),

wherein R₂₀ is hydrogen, CN, C₁-C₄-alkyl, C₁-C₄-alkoxy or halogen, and E stands for hydrogen or for B, with the proviso that at least one E stands for B; or


wherein the compound of formula I is a benzimidazolone-azocompound of formula

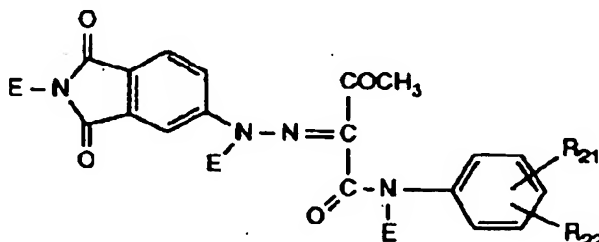

(XIV),


wherein R₂₁ and R₂₂ are each independently of the other hydrogen, halogen, C₁-C₄-alkyl or C₁-C₄-alkoxy, and E stands for hydrogen or for B, with the proviso that at least one E stands for B; or

wherein the compound of formula I is an anthraquinone compound of formula

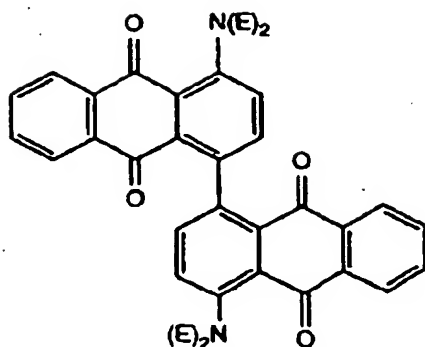

(XV),

wherein E stands for hydrogen or for B, with the proviso that at least one E stands for B; or
wherein the compound of formula I is a phthalocyanine of formula

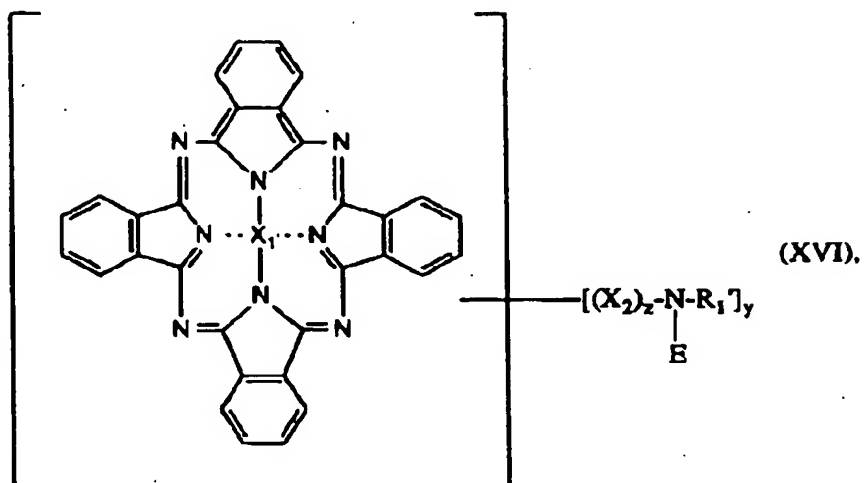


(XVI),

wherein X_1 is H_2 , Zn, Cu, Ni, Fe or V,

X_2 is $-CH(R_2')-$ or $-SO_2-$,

R_1' is hydrogen, C_1-C_4 -alkyl, $-N(E)R_2'$, $-NHCOR_3'$, $-COR_3'$ or




R_2' is hydrogen or C_1-C_4 -alkyl,

R_3' is C_1-C_4 -alkyl,

R_4' is hydrogen, halogen, C_1-C_4 -alkyl or C_1-C_4 -alkoxy,


z is zero or 1 and y is an integer of 1 - 4, and

E stands for hydrogen or for B, with the proviso that at least one E stands for B; or
wherein the compound of formula I is a pyrrolo[3,4-c]pyrrole of formula




(XVII).


wherein G_1 and G_2 are each independently of the other a group of formula

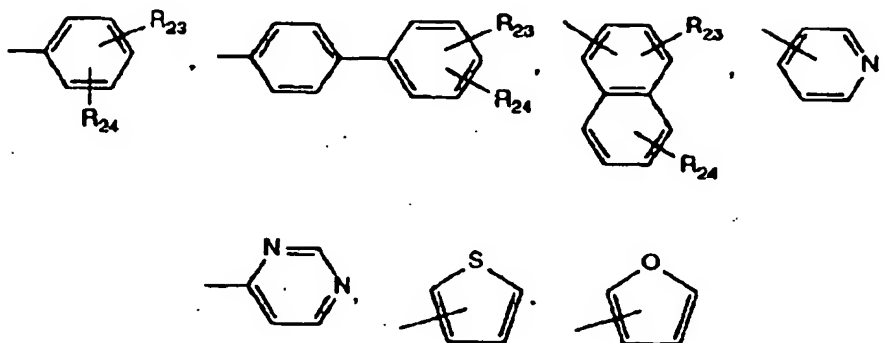

or

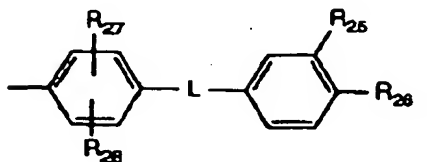

R_{23} and R_{24} are each independently of the other hydrogen, halogen, C_1 - C_{18} -alkyl, C_1 - C_{18} -alkoxy, C_1 - C_{18} -alkylmercapto, C_1 - C_{18} -alkylamino, -CN, -NO₂, phenyl, trifluoromethyl, C_6 - C_6 -cycloalkyl, -C=N-(C_1 - C_{18} -alkyl),



imidazolyl,

pyrazolyl, triazolyl, piperazinyl, pyrrolyl, oxazolyl, benzoxazolyl, benzthiazolyl, benzimidazolyl, morpholinyl, piperidinyl or pyrrolidinyl.

L is -CH₂-, -CH(CH₃)-, -C(CH₃)₂-, -CH=N-, -N=N-, -O-, -S-, -SO-, -SO₂- or -NR₂₉.


R_{25} and R_{26} are each independently of the other hydrogen, halogen, C_1 - C_6 -alkyl, C_1 - C_{18} -alkoxy or -CN,

R_{27} and R_{28} are each independently of the other hydrogen, halogen or C_1 - C_6 -alkyl.

R_{29} is hydrogen or C_1 - C_6 -alkyl, and

E stands for hydrogen or for B , with the proviso that at least one E stands for B .

7. A composition according to claim 6, wherein the compound of formula I is one selected under those of formulae

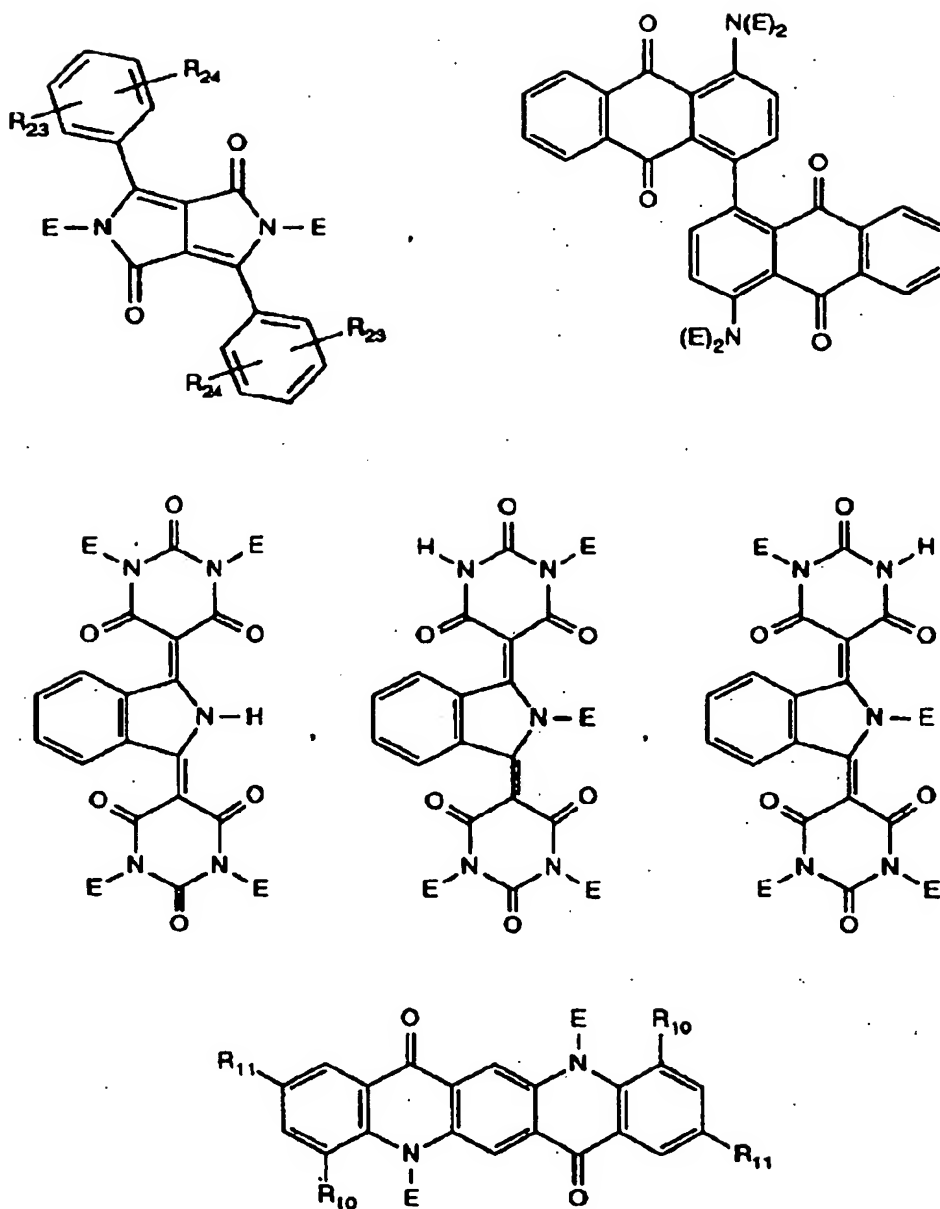

or mixtures thereof,
 where E is -C(=O)-O-C(CH₃)₃, and where R₁₀ and R₁₁ are each independently of the other hydrogen, ha-
 logen, C₁-C₆-alkyl or C₁-C₄-alkoxy, and where R₂₃ and R₂₄ are hydrogen, halogen, C₁-C₆-alkyl, C₁-C₄-al-
 koxy, phenyl or cyano.

8. A composition according to claim 1, wherein said component (b), the positive or negative resist-type resin, polymer or prepolymer is one selected from the group consisting of positive resists, negative resists, photo-
 polymers, positive deep-UV resists, negative deep-UV resists, positive electron resists, negative elec-
 tron resists, positive X-ray resists, negative X-ray resists, chemically or thermally effectable polymers,
 positive ion beam resists, negative ion beam resists, silicon containing positive resists and silicon con-
 taining negative resists.

9. A composition according to claim 1, which in addition to components (a) and (b), also comprises (c) a catalyst for positive or negative polymer structuring and/or a catalyst for pigment formation, preferably an acid or base catalyst, more preferably a latent acid or base catalyst, most preferably wherein said catalyst is an onium salt, a diazonium, sulfonium, sulfoxonium or iodonium salt.
10. A method for producing colored patterns or images including the steps of
 - (1) forming a polymer layer containing dissolved pigment precursor using a composition of claim 1, and
 - (2) locally regenerating the pigment from the above soluble precursor by chemical, photolytical or thermal means, by laser or other sources of irradiation.
11. A method according to claim 10, wherein said step (1) is carried out by one selected from the group consisting of photolithography, screen printing, gravure printing, flexo printing, offset printing, ink-jet printing and electrodeposition, and/or wherein in step (2) the pigment is locally regenerated from the soluble precursor by laser marking.
12. A method for producing colored patterns or images including the steps of
 - (1) forming a polymer layer containing a dissolved pigment precursor component (a), a high molecular weight organic binder material (b') and optionally (c), and
 - (2) locally regenerating the pigment from the above soluble precursor by chemical, photolytical or thermal means, or by laser or other sources of irradiation.
13. A method according to claim 12, wherein component (b') is polystyrene, poly(vinyl alcohol), or wherein component (b') is polyester, poly(vinyl chloride / vinyl acetate), polycarbonate or a mixture thereof.
14. A method according to claim 12, wherein said step (1) is carried out by
 - (1a) forming a polymer layer containing a high molecular weight organic binder material (b') and optionally (c), then
 - (1b) ink-jetting an ink comprising a pigment precursor (a) onto the polymer layer in selected target areas.
15. A method according to claim 12, wherein said step (1) is carried out by
 - (1a) forming a polymer layer containing a high molecular weight organic binder material (b') and optionally (c), then
 - (1b) superposing a donor layer comprising a pigment precursor (a) and a high molecular weight organic binder material (b') onto the polymer layer,
 - (1c) locally heating the donor layer to transfer the dye in selected target areas, and
 - (1d) removing the donor layer from the receiver layer.
16. A method for producing a color filter for LCDs, including the steps of
 - (1) forming a polymer layer containing dissolved pigment precursor on a transparent substrate using a composition of claim 1,
 - (2) locally regenerating the pigment from the above soluble precursor by chemical, photolytical or thermal means, or by laser or other sources of irradiation, or a combination thereof, preferably by laser marking, and
 - (3) repeating the above steps (1) - (2) three times with changing the precursor so that colored patterns of blue, green and red are obtained.
17. A method for producing a color filter for LCDs, including the steps of
 - (1) forming a polymer layer containing a dissolved pigment precursor component (a), a high molecular weight organic binder material (b') and optionally (c),
 - (2) repeating the above step (1) three times with changing pigment precursor so that colored patterns of blue, green and red are obtained in step (3), and
 - (3) locally regenerating the pigment from the above soluble precursor by chemical-, photolytical- or thermal means, or by laser or other sources of irradiation, or a combination thereof, preferably by laser marking.



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 94 81 0649

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	GB-A-1 386 586 (KODAK LIMITED) * page 2, line 38 - line 40 * * page 3, line 1 - line 2 * * page 3, line 8 - line 10 *	1,2, 8-10,12	G03F7/004 G03F7/105 G03C7/12
X	EP-A-0 483 412 (AGFA-GEVAERT N.V.) * page 2, line 42 - line 49 * * page 5, line 5 - line 10 *	1	
A	EP-A-0 483 693 (TOYO GOSEI KOGYO CO.) * page 5, line 22 - line 23 * * page 5, line 48 - line 56; claims *	1-17	
A,D	EP-A-0 133 156 (CIBA-GEIGY AG) * page 11, paragraph 3 *	6	
A	DATABASE WPI Section Ch, Week 9301, Derwent Publications Ltd., London, GB; Class A89, AN 93-005193 & JP-A-4 333 850 (KONICA CORP) 20 November 1992 * abstract *	1-17	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			G03F G03C
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 1 March 1995	Examiner J.-M. DUPART
CATEGORY OF CITED DOCUMENTS		I : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons A : member of the same patent family, corresponding document X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure F : intermediate document	

EPO FORM 150 (Rev. 1/93)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.